
BUILT-IN REFRIGERATOR COLUMNS
BUILT-IN FREEZER COLUMNS
BUILT-IN WINE COLUMNS
BUILT-IN BOTTOM MOUNT

DESIGN GUIDE - NORTH AMERICA



REFRIGERATORS

Refrigerators are a core building block of every kitchen. Bertazzoni offers a wide range of applications, sizes, and installation options, which are all harmonized by design to match the entire kitchen appliance suite.

Bertazzoni refrigerators are available in various styles, including Columns, Bottom Mount, and French Door models. With the Bertazzoni Design Guide, you can enjoy flawless installation of all the built-in 84" models from the both the T and V tier lineup.

These built-in models are designed to accommodate custom kitchen panels or stainless-steel doors and handles that match the other appliances in your kitchen. They can be installed proud or flush with the cabinets, bringing your personal style to the kitchen.

We've taken care of every detail so that you can enjoy a seamless and elegant look in your kitchen.

INDEX



INTRODUCTION	2	BUILT-IN BOTTOM MOUNT REFRIGERATORS	76
T TIER LINE UP	4	36" Bottom Mount Panel Installed	78
BUILT-IN REFRIGERATOR COLUMNS	5	36" Bottom Mount Panel Ready	81
36" Refrigerator Column Panel Installed	7	30" Bottom Mount Panel Installed	84
36" Refrigerator Column Panel Ready	10	30" Bottom Mount Panel Ready	87
30" Refrigerator Column Panel Installed	13	BOTTOM MOUNT MULTIPLE INSTALLATIONS	90
30" Refrigerator Column Panel Ready	16	60" Bottom Mount Double Configurations	93
24" Refrigerator Column Panel Installed	19	66" Bottom Mount Configurations	94
24" Refrigerator Column Panel Ready	22	72" Bottom Mount Configurations	95
BUILT-IN FREEZER COLUMNS	25	48" Double Configurations	96
30" Freezer Column Panel Installed	27	54" Double Configurations	97
30" Freezer Column Panel Ready	30	60" Double Configurations	98
24" Freezer Column Panel Installed	33	Bottom Mount Custom Door Panel	99
24" Freezer Column Panel Ready	36	Bottom Mount Refrigeration Handles	100
18" Freezer Column Panel Installed	39	V TIER LINE UP	101
18" Freezer Column Panel Ready	42	BUILT-IN REFRIGERATOR COLUMNS	102
BUILT-IN WINE COLUMNS	45	30" Refrigerator Column Panel Ready	104
24" Wine Column Panel Installed	47	BUILT-IN FREEZER COLUMNS	107
24" Wine Column Panel Ready	50	18" Freezer Column Panel Ready	109
18" Wine Column Panel Installed	53	COLUMNS MULTIPLE INSTALLATIONS	112
18" Wine Column Panel Ready	56	48" Double Configurations	115
COLUMNS MULTIPLE INSTALLATIONS	59	Custom Door Panel	116
42" Double Configurations	62	Recommended Installations	117
48" Double Configurations	63	Refrigeration Handles	118
54" Double Configurations	64	BUILT-IN BOTTOM MOUNT REFRIGERATORS	119
60" Double Configurations	65	36" Bottom Mount Panel Ready	121
60" Triple Configurations	66	30" Bottom Mount Panel Ready	124
66" Triple Configurations	67	BOTTOM MOUNT MULTIPLE INSTALLATIONS	127
72" Triple Configurations	68	60" Bottom Mount Double Configurations	130
78" Triple Configurations	69	66" Bottom Mount Double Configurations	131
84" Triple Configurations	70	72" Bottom Mount Double Configurations	132
90" Triple Configurations	71	Bottom Mount Custom Door Panel	133
Custom Door Panel	72	Bottom Mount Refrigeration Handles	134
Recommended Installations	73		
Refrigeration Handles	74		
Toekick Panel	75		

T TIER LINE UP



BUILT-IN REFRIGERATOR COLUMNS




BUILT-IN COLUMNS

Refrigerators, freezers, and wine columns from the T tier are masterpieces of design and technology. Their stylish appearance reflects close attention to detail and high-quality materials, inside and out.

The stainless steel front and panel-ready doors are mounted with state-of-the-art engineered lift-and-swing hinges that give the perception of a weightless range of motion. Versatile installation options make it possible to bring together elegant configurations of the refrigerator, freezer, and wine column in any desired width. All three columns work in harmony with handles and finishes available for every Series.

36" - 30" - 24"
Panel Ready and
Panel Installed





36" Refrigerator Column Panel Installed

Dimensions



REF36RCPIXL/23 left hinge
REF36RCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

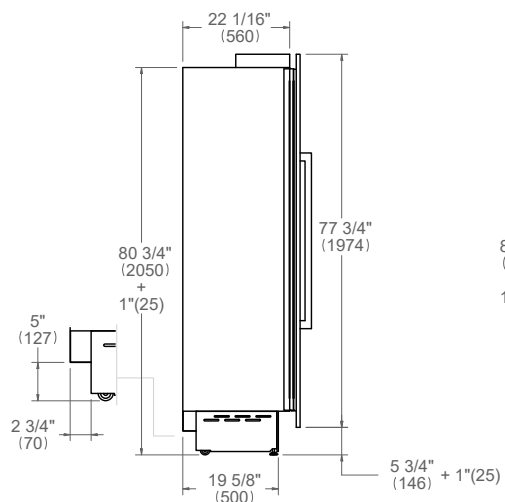


FRONT VIEW

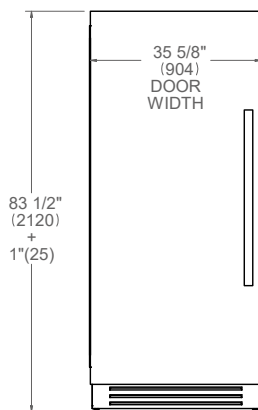


TOP VIEW

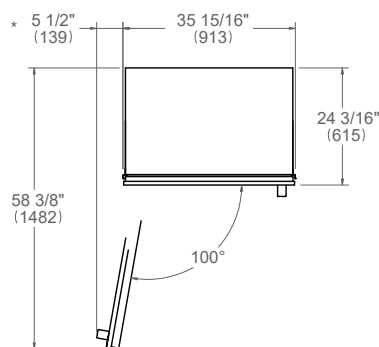


SIDE VIEW

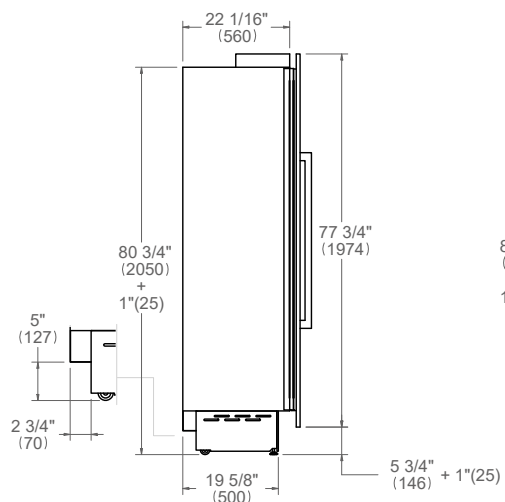

FRONT VIEW

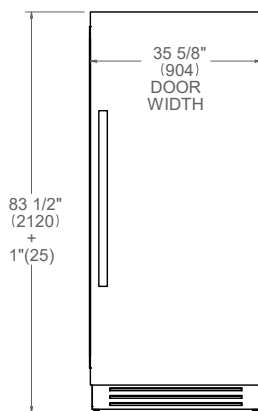

TOP VIEW

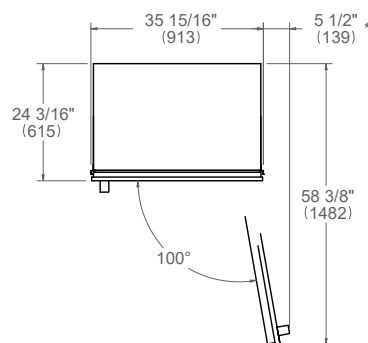

* Maximum Overall Handle Dimension

For detailed handle dimensions see page 74

36" Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg)
------------------------	-------------------

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 218 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

36" Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

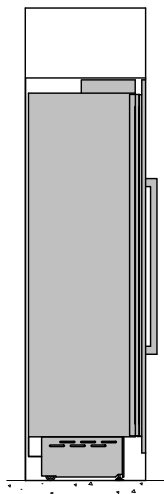

FRONT VIEW

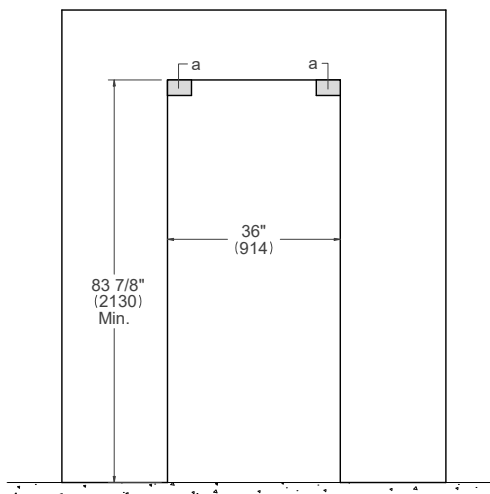

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


36" Refrigerator Column Panel Ready

Dimensions




REF36RCPRL/23 left hinge
REF36RCPRR/23 right hinge


SIDE VIEW

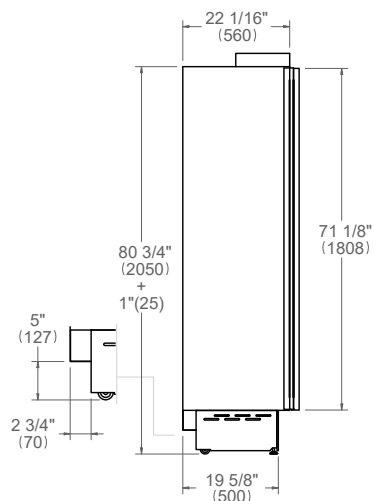


FRONT VIEW

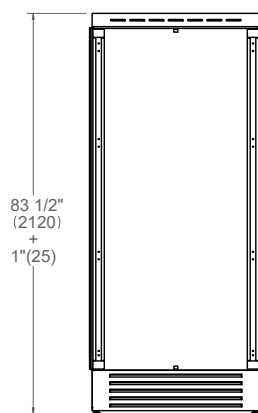


TOP VIEW

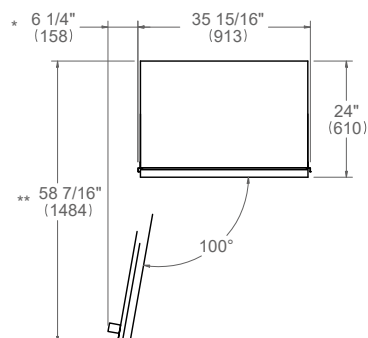


SIDE VIEW

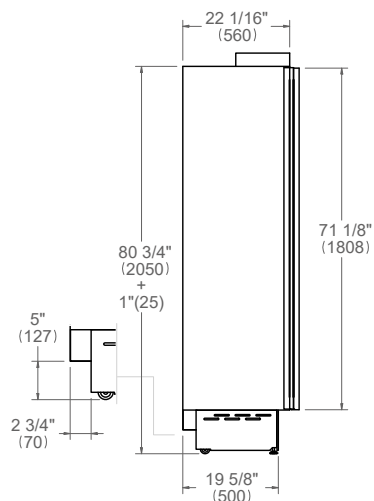

FRONT VIEW

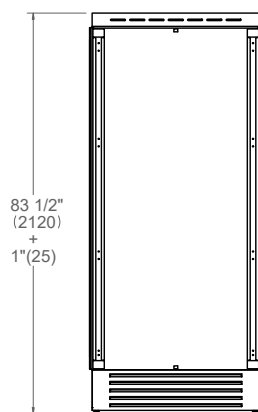

TOP VIEW

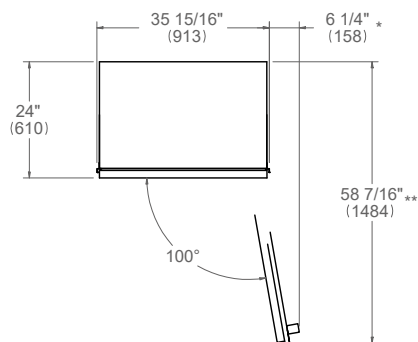

* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

36" Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg)
------------------------	-------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 218 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

36" Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

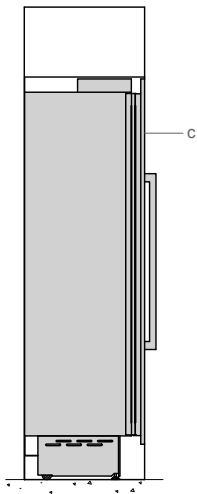

FRONT VIEW

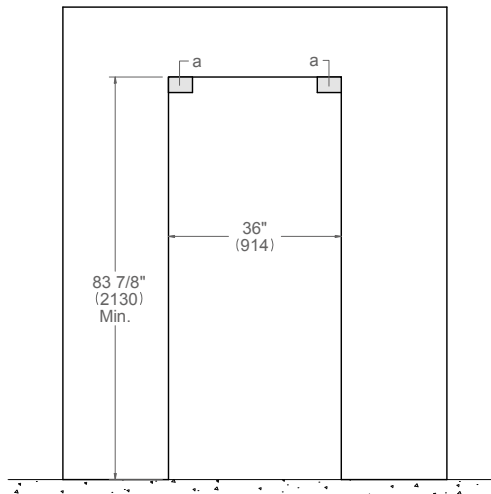

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

30" Refrigerator Column Panel Installed

Dimensions



REF30RCPIXL/23 left hinge
REF30RCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

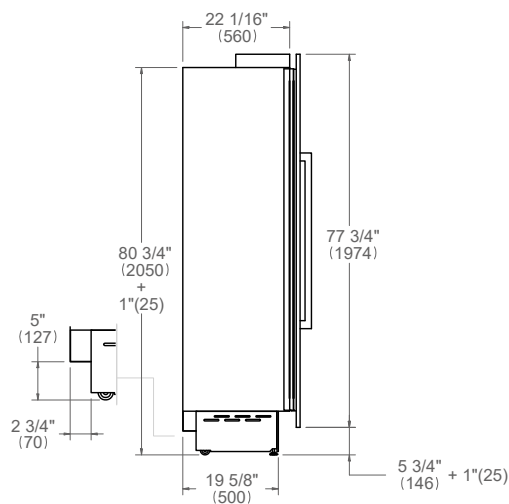


FRONT VIEW

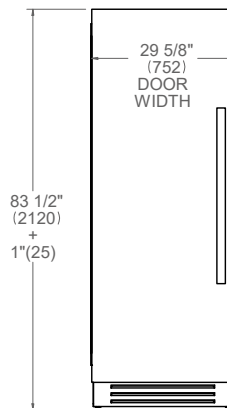


TOP VIEW




SIDE VIEW

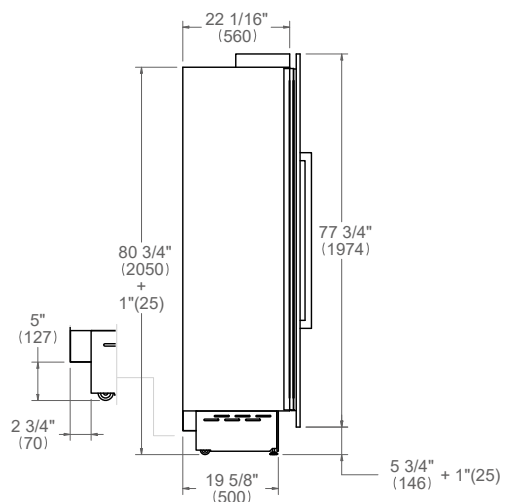

FRONT VIEW

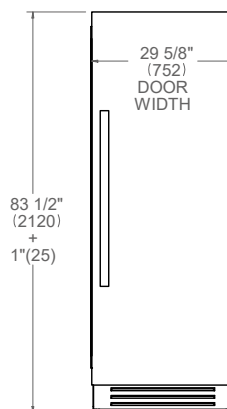

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

30" Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	-------------------

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 218 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

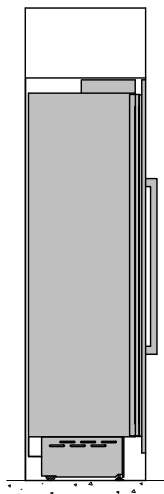

FRONT VIEW

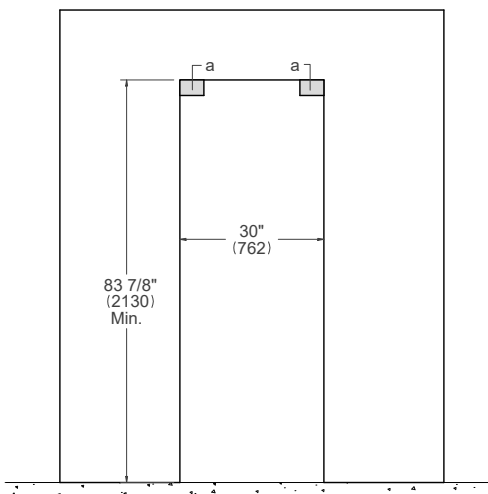

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


30" Refrigerator Column Panel Ready

Dimensions




REF30RCPRL/23 left hinge
REF30RCPRR/23 right hinge


SIDE VIEW

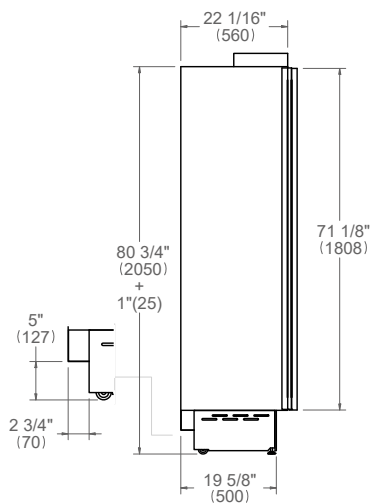


FRONT VIEW

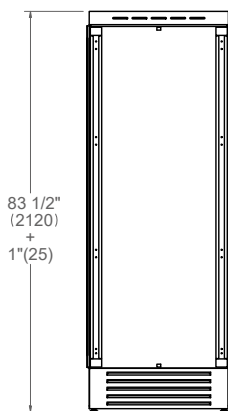


TOP VIEW




SIDE VIEW

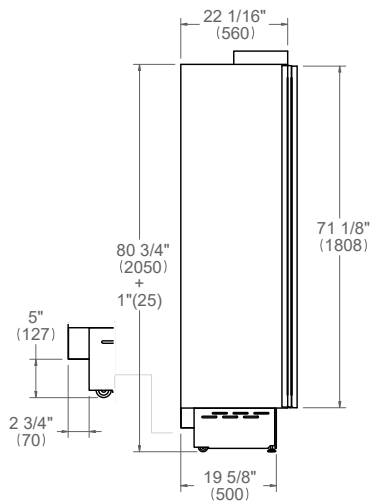

FRONT VIEW

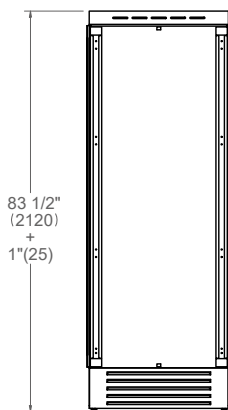

TOP VIEW

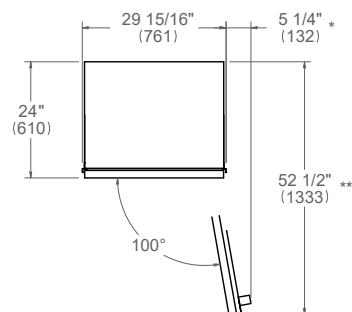

* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

30" Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	-------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 218 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

30" Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

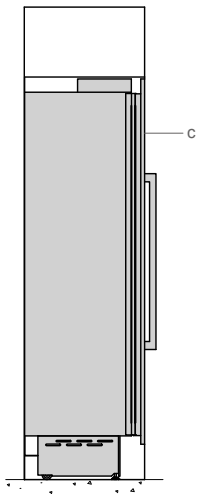

FRONT VIEW

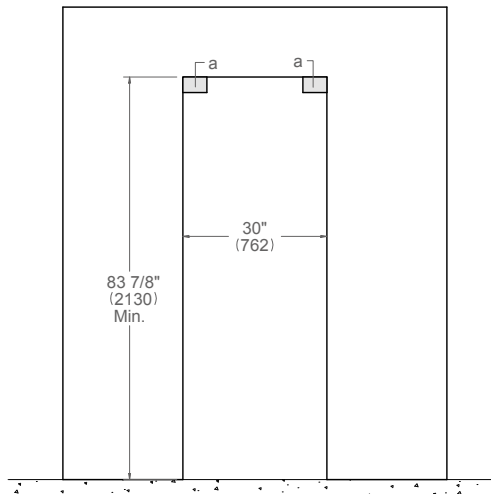

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

24" Refrigerator Column Panel Installed

Dimensions



REF24RCPIXL/23 left hinge
REF24RCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

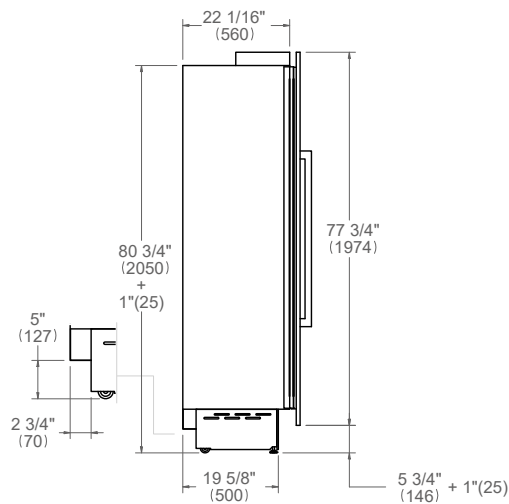


FRONT VIEW

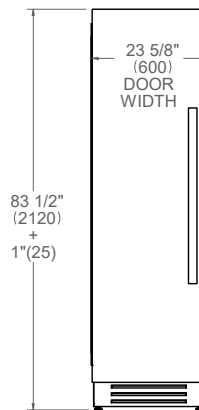


TOP VIEW




SIDE VIEW

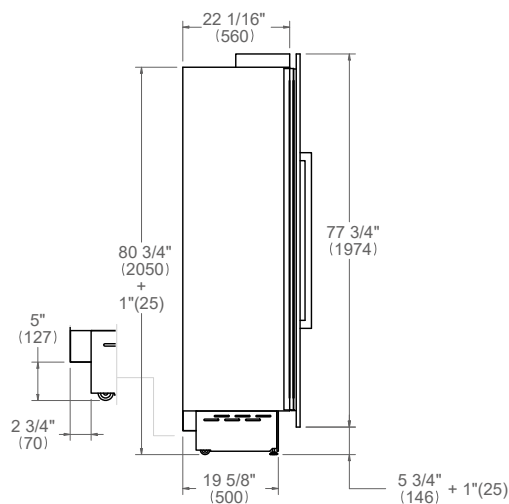

FRONT VIEW

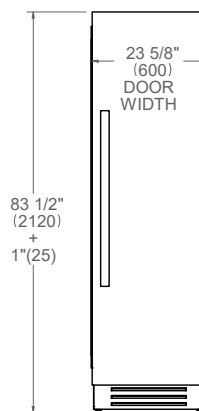

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

24" Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 163 W 1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

24" Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

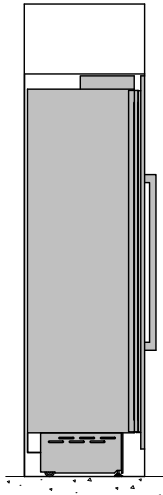

FRONT VIEW

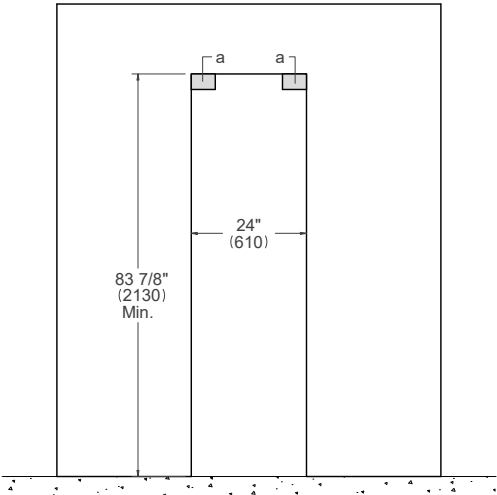

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


24" Refrigerator Column Panel Ready

Dimensions




REF24RCPRL/23 left hinge
REF24RCPRR/23 right hinge


SIDE VIEW

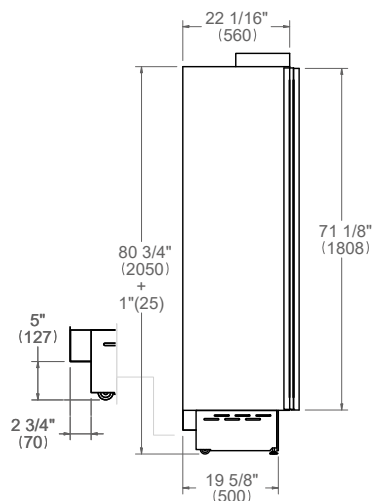


FRONT VIEW

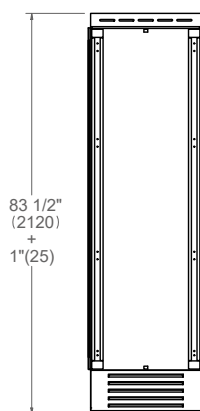


TOP VIEW




SIDE VIEW

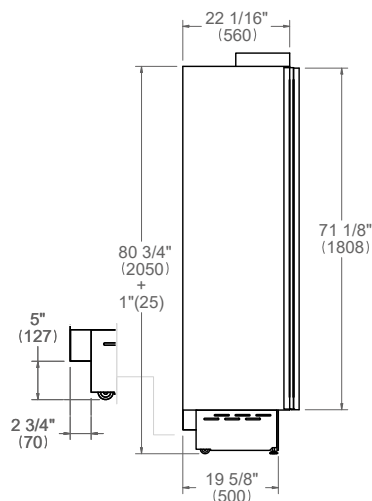

FRONT VIEW

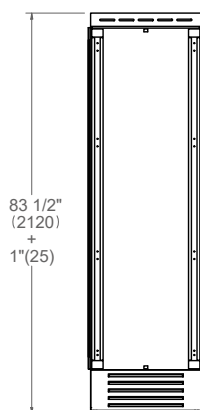

TOP VIEW



* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

24" Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 163 W 1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

24" Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

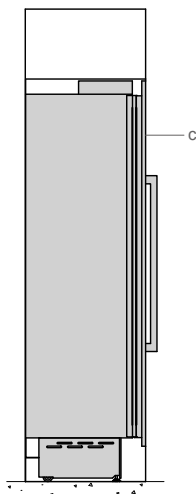

FRONT VIEW

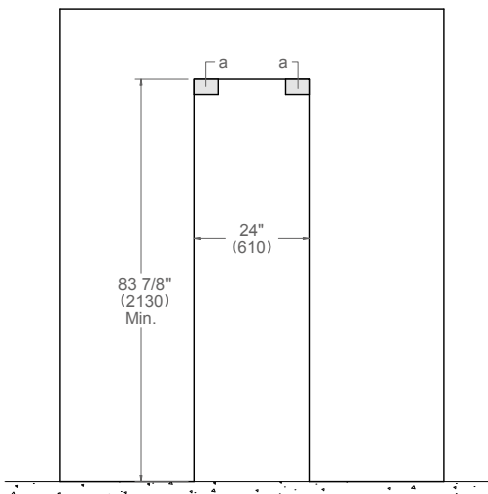

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

BUILT-IN FREEZER COLUMNS



30" - 24" - 18"
Panel Ready and
Panel Installed





30" Freezer Column Panel Installed

Dimensions



REF30FCPIXL/23 left hinge
REF30FCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

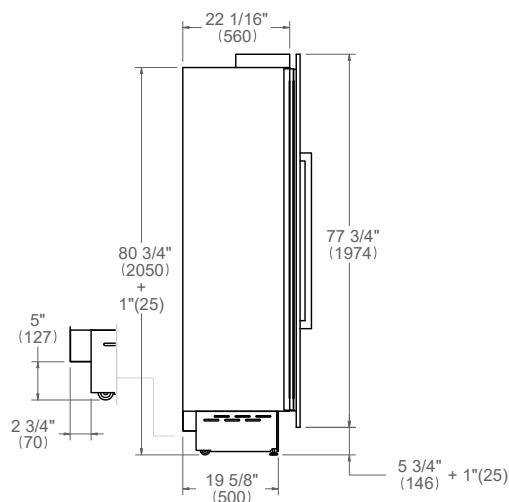


FRONT VIEW

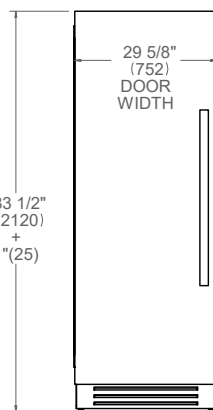


TOP VIEW




SIDE VIEW

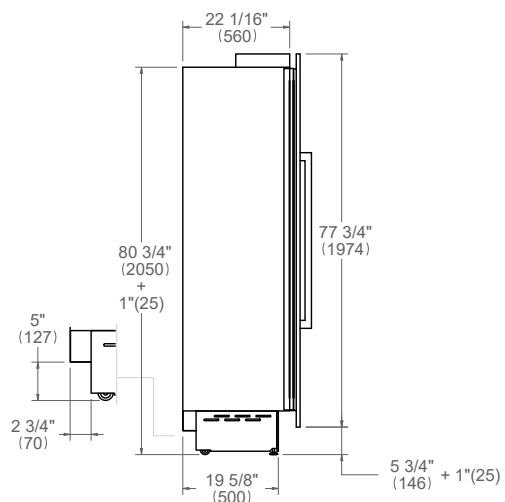

FRONT VIEW

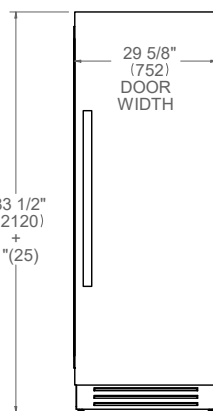

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

30" Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1257 lb (570 kg)
------------------------	-------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Freezer Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

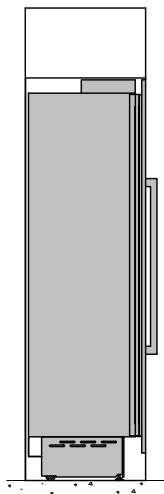

FRONT VIEW

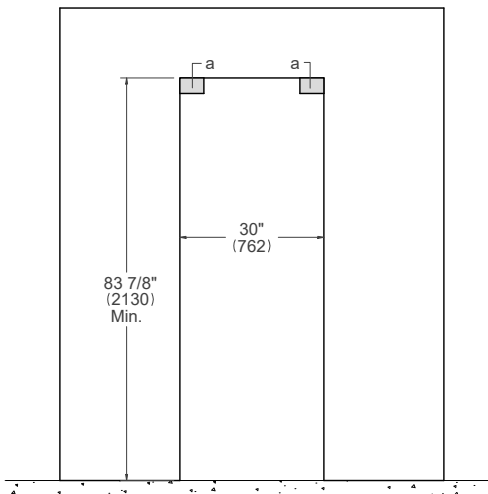

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


30" Freezer Column Panel Ready

Dimensions



REF30FCPRL/23 left hinge
REF30FCPRR/23 right hinge


SIDE VIEW

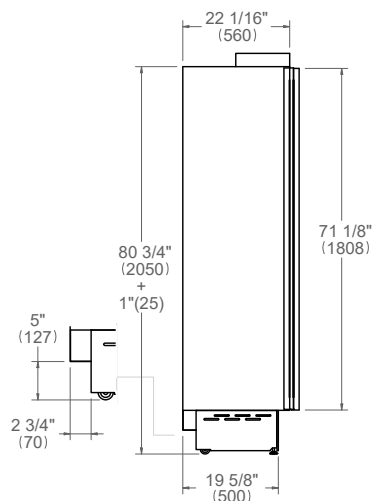


FRONT VIEW



TOP VIEW




SIDE VIEW

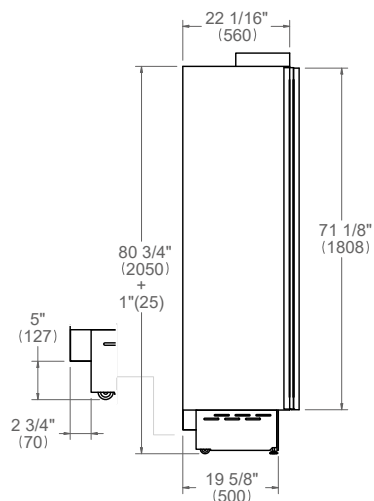

FRONT VIEW



TOP VIEW

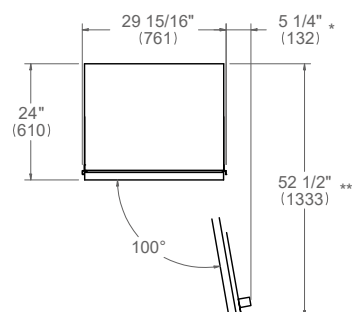

* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

30" Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between $\frac{3}{4}$ " (19 mm) and 1 $\frac{1}{8}$ " (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
-------------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a $\frac{1}{4}$ " waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is $\frac{3}{4}$ " diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

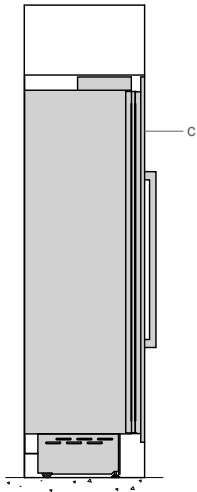

FRONT VIEW

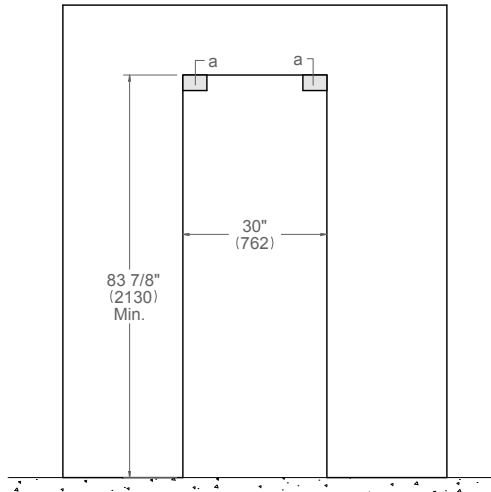

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

24" Freezer Column Panel Installed

Dimensions



REF24FCIPIXL/23 left hinge
REF24FCIPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

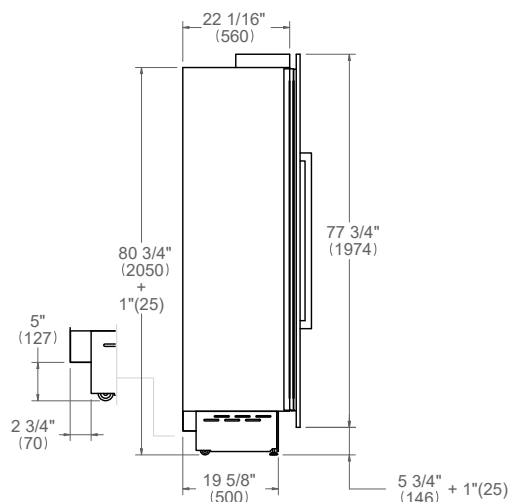


FRONT VIEW

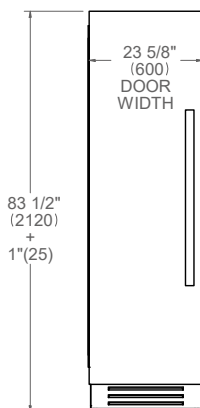


TOP VIEW




SIDE VIEW

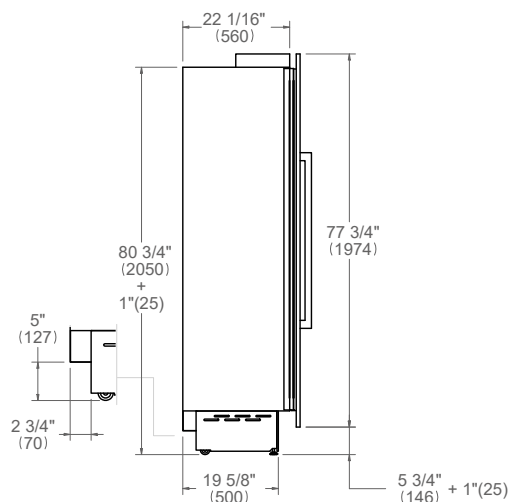

FRONT VIEW

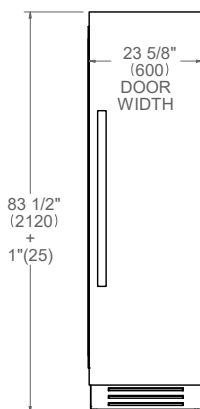

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

24" Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product..

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

24" Freezer Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

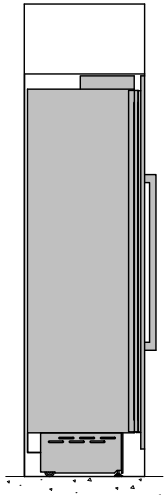

FRONT VIEW

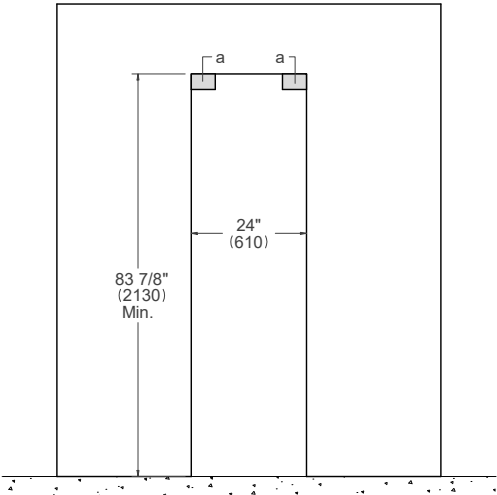

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


24" Freezer Column Panel Ready

Dimensions




REF24FCIPRL/23 left hinge
REF24FCIPRR/23 right hinge


SIDE VIEW

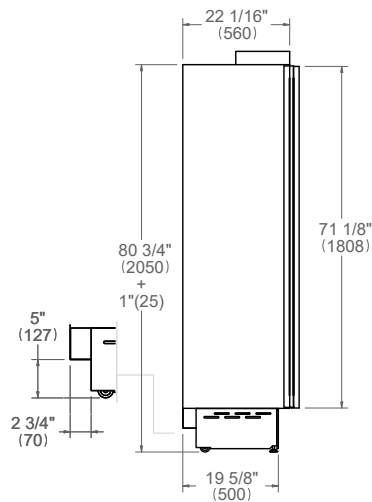


FRONT VIEW

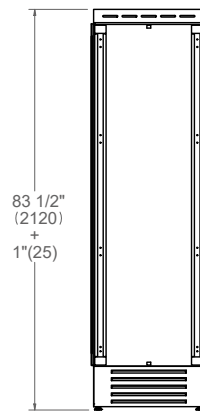


TOP VIEW




SIDE VIEW

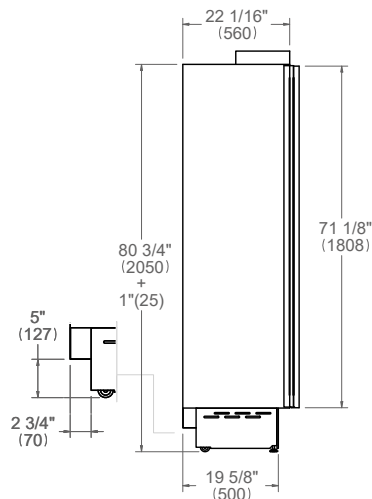

FRONT VIEW

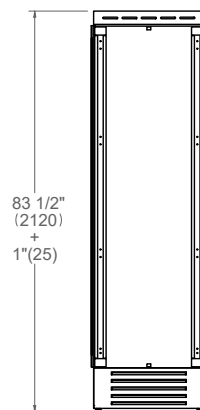

TOP VIEW



* Maximum Overall Handle Dimension
** 3/4" (19mm) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

24" Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.


A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

24" Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

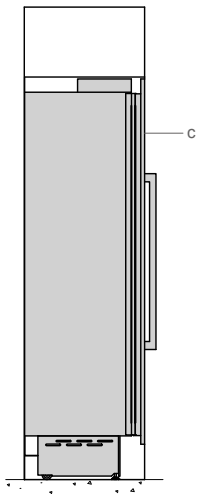

FRONT VIEW

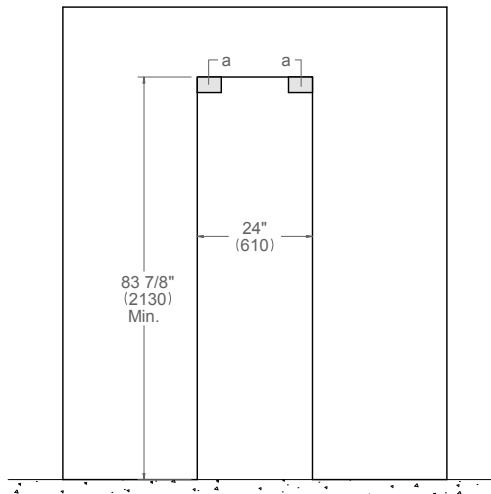

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

18" Freezer Column Panel Installed

Dimensions



REF18FCIPIXL/23 left hinge
REF18FCIPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

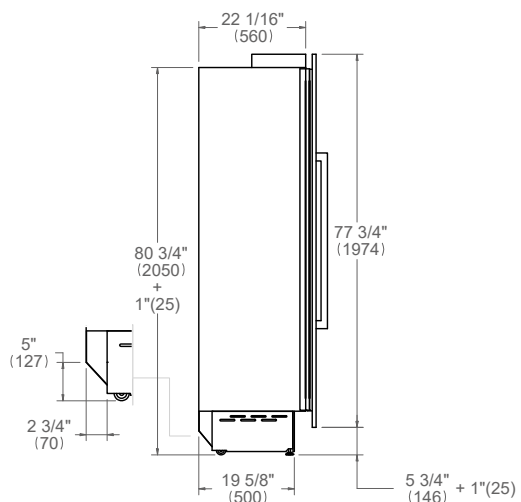


FRONT VIEW

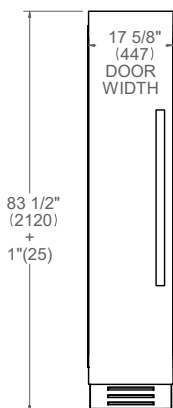


TOP VIEW




SIDE VIEW

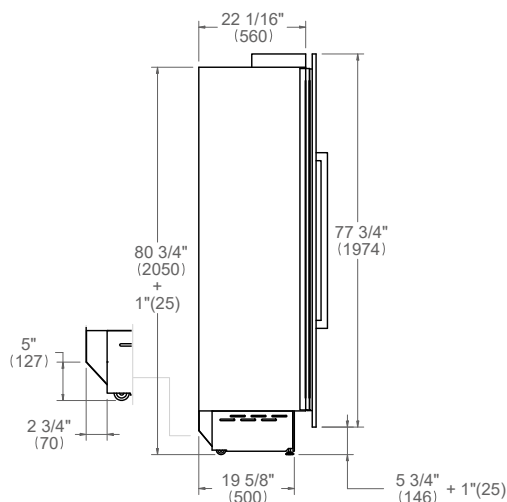

FRONT VIEW

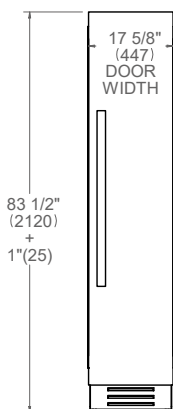

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

18" Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	694 lb (315 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

18" Freezer Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

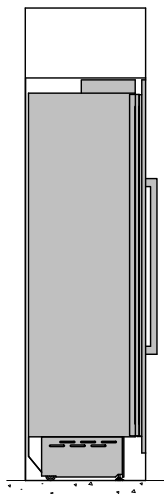

FRONT VIEW

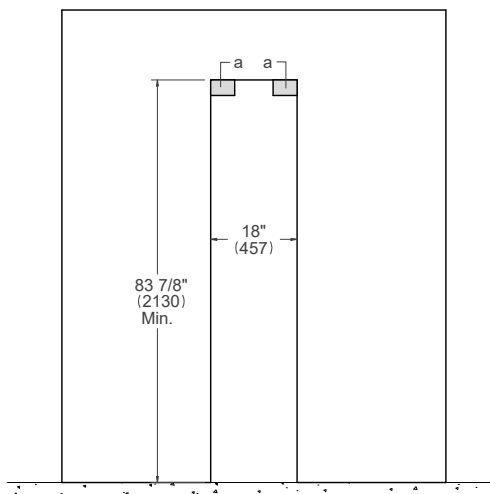

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


18" Freezer Column Panel Ready

Dimensions




REF18FCIPRL/23 left hinge
REF18FCIPRR/23 right hinge


SIDE VIEW

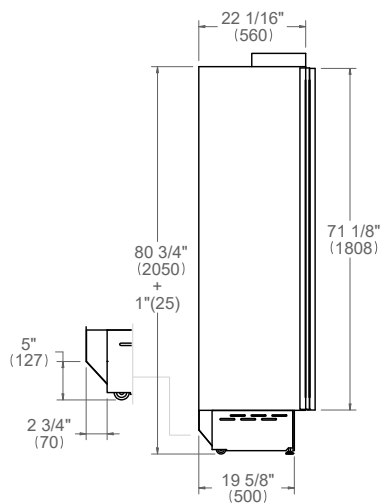


FRONT VIEW

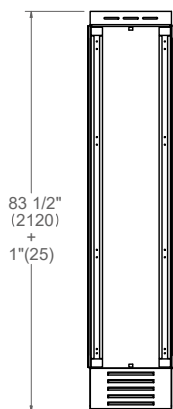


TOP VIEW




SIDE VIEW

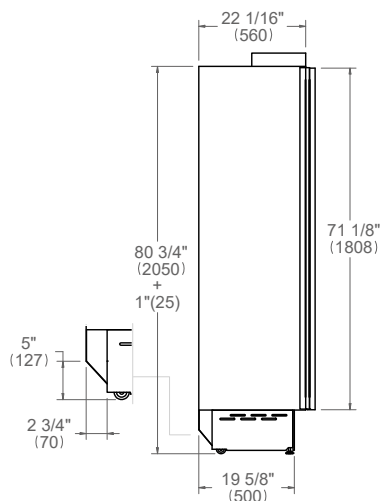

FRONT VIEW

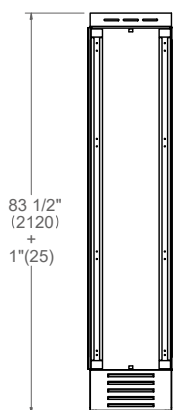

TOP VIEW



* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

18" Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

18" Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

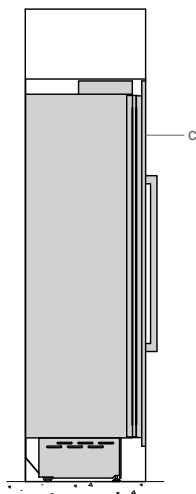

FRONT VIEW

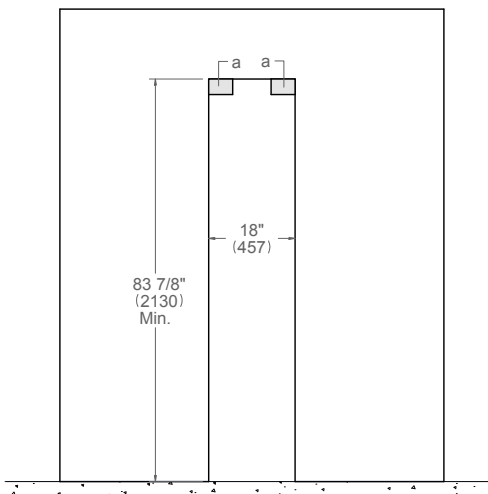

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

BUILT-IN WINE COLUMNS



24" - 18"
Panel Ready and
Panel Installed





24" Wine Column Panel Installed

Dimensions



REF24WCPIXL/23 left hinge
REF24WCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

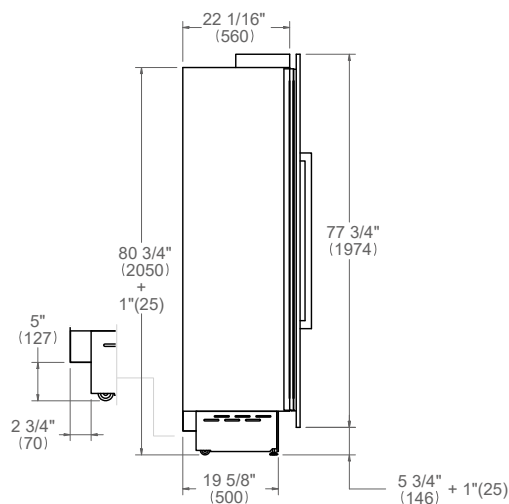


FRONT VIEW

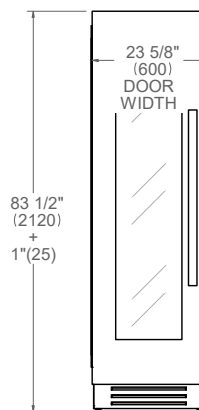


TOP VIEW




SIDE VIEW

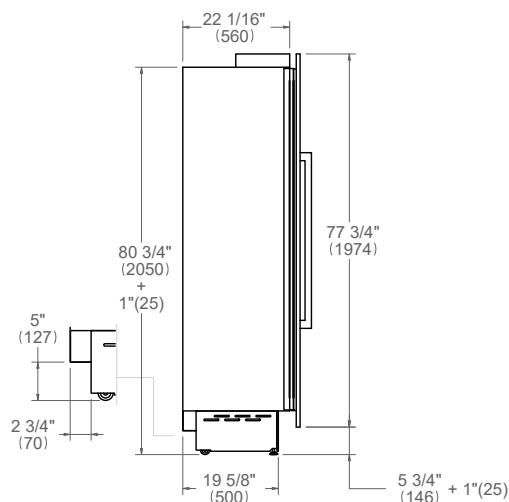

FRONT VIEW

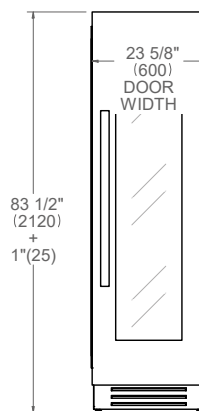

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

24" Wine Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg)
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 152 W 1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

24" Wine Column Panel Installed


Flush installation




TOP VIEW^b

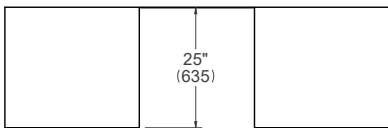

SIDE VIEW

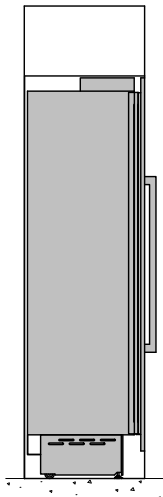

FRONT VIEW

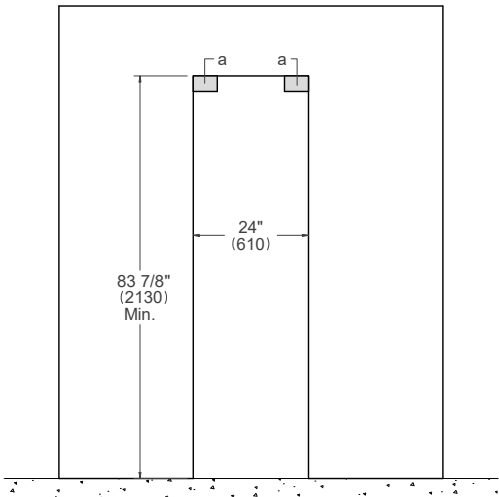

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


24" Wine Column Panel Ready

Dimensions




REF24WCPRL/23 left hinge
REF24WCPRR/23 right hinge


SIDE VIEW

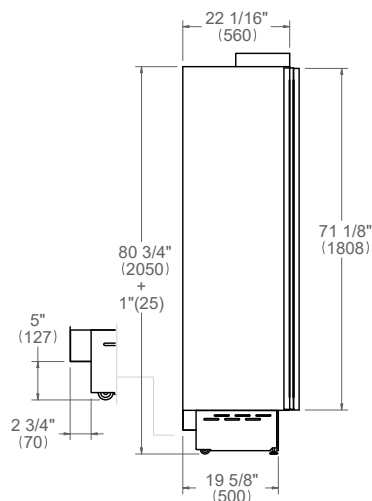


FRONT VIEW

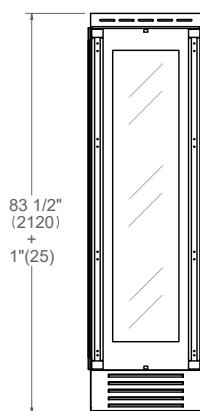


TOP VIEW




SIDE VIEW

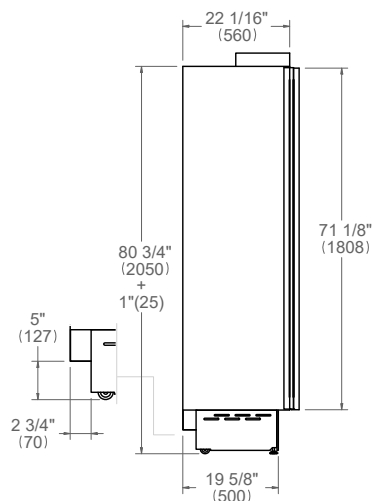

FRONT VIEW

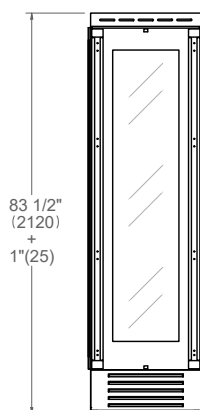

TOP VIEW



* Maximum Overall Handle Dimension
** 3/4" (19mm) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.
For custom panel dimensions and window cutout see page 69.

24" Wine Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg)
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 152 W 1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

24" Wine Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

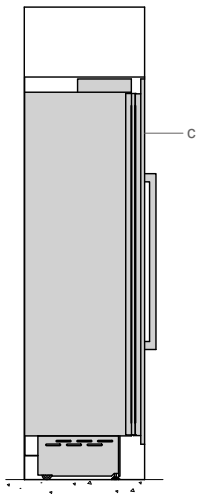

FRONT VIEW

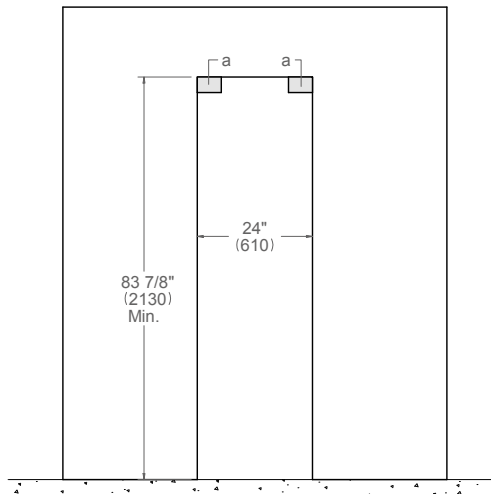

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

18" Wine Column Panel Installed

Dimensions



REF18WCPIXL/23 left hinge
REF18WCPIXR/23 right hinge


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

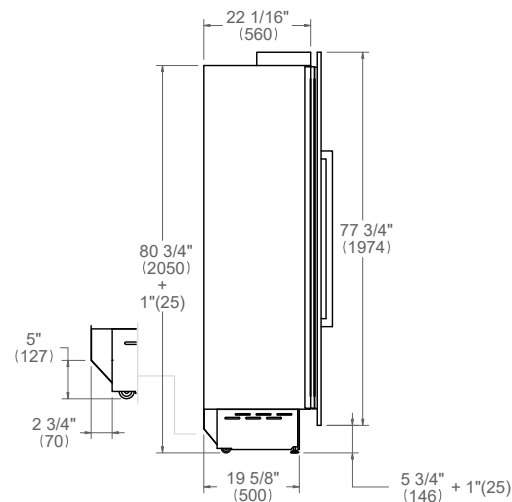


FRONT VIEW

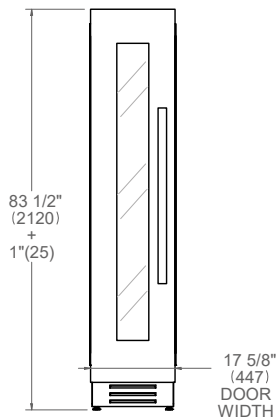


TOP VIEW




SIDE VIEW

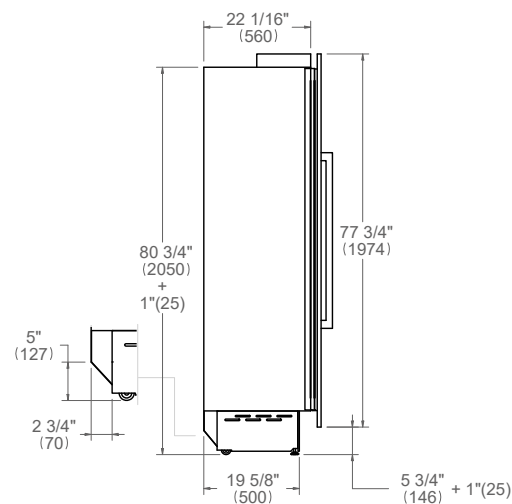

FRONT VIEW

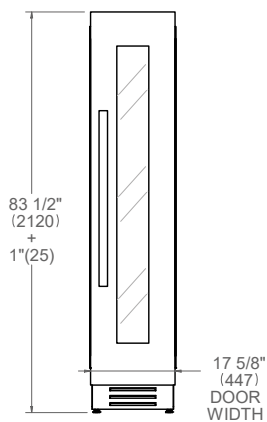

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

18" Wine Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 152 W 1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

18" Wine Column Panel Installed


Flush installation




TOP VIEW^b

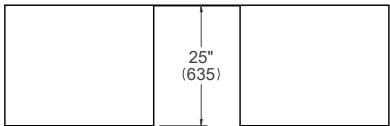

SIDE VIEW

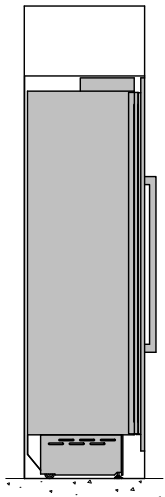

FRONT VIEW

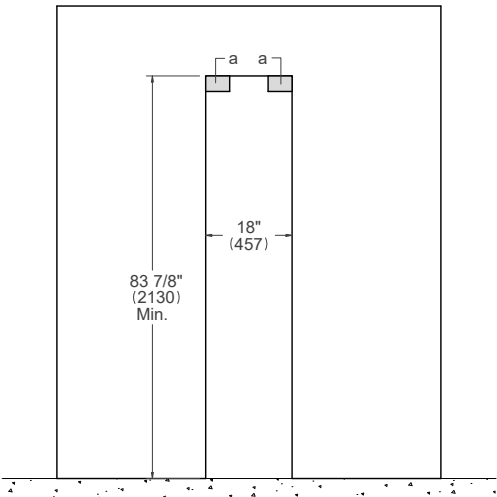

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


18" Wine Column Panel Ready

Dimensions




REF18WCPRL/23 left hinge
REF18WCPRR/23 right hinge


SIDE VIEW

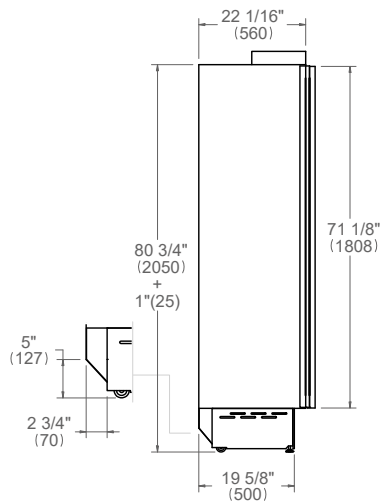


FRONT VIEW

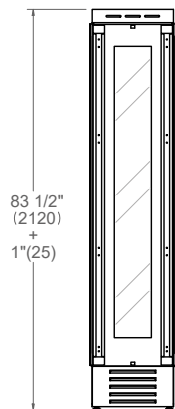


TOP VIEW




SIDE VIEW

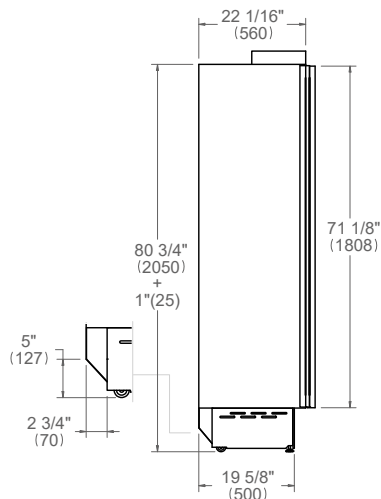

FRONT VIEW

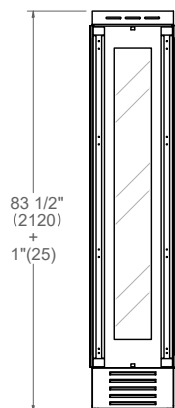

TOP VIEW



* Maximum Overall Handle Dimension
** 3/4" (19mm) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.
For custom panel dimensions and window cutout see page 69.

18" Wine Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 152 W 1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

18" Wine Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

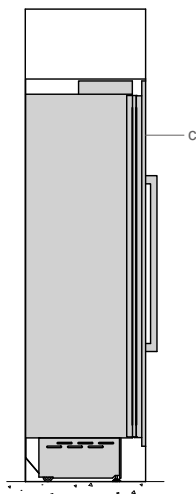

FRONT VIEW

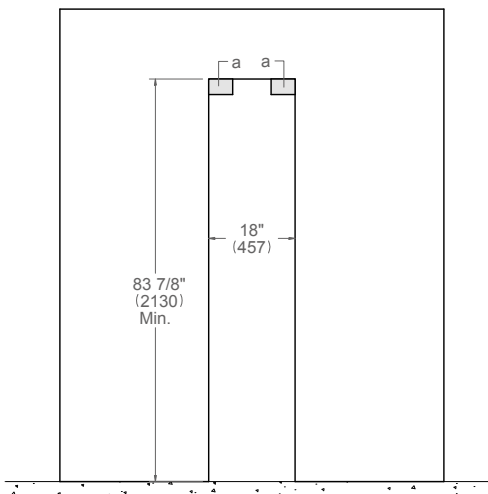

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

COLUMNS MULTIPLE INSTALLATIONS





Multiple installations

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation. Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate 10 Amp circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.

42" Double Configurations


Flush installation



POSSIBLE COMBINATIONS ^c


REF24RCPIX(L/R)/23
REF18FCIPIX(L/R)/23

REF24RCPR(L/R)/23
REF18FCIPR(L/R)/23




REF24RCPIX(L/R)/23
REF18WCPIX(L/R)/23


REF24RCPR(L/R)/23
REF18FCIPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

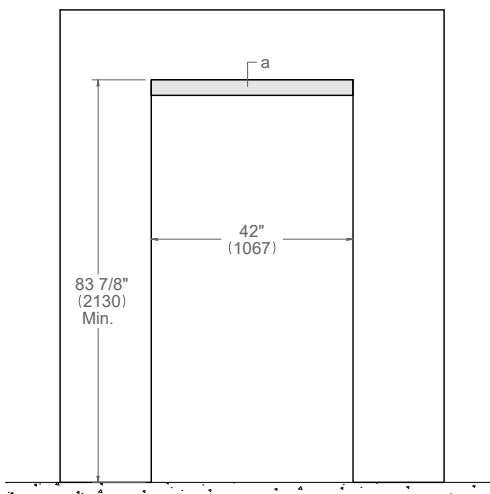

(a) Area to be left clear for the anti-tipping brackets – 42"x4" (1067x100mm)
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.
c: Optional 42 inch bridge toe kick accessory is available.
For details see page 75


48" Double Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


REF30RCPIX(L/R)/23
REF18FCPIX(L/R)/23
REF30RCPR(L/R)/23
REF18FCIPR(L/R)/23




REF30RCPIX(L/R)/23
REF18WCPIX(L/R)/23
REF30RCPR(L/R)/23
REF18WCPR(L/R)/23



REF24RCPIX(L/R)/23
REF24FCPIX(L/R)/23
REF24RCPR(L/R)/23
REF24FCIPR(L/R)/23




REF24RCPIX(L/R)/23
REF24WCPIX(L/R)/23
REF24RCPR(L/R)/23
REF24WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

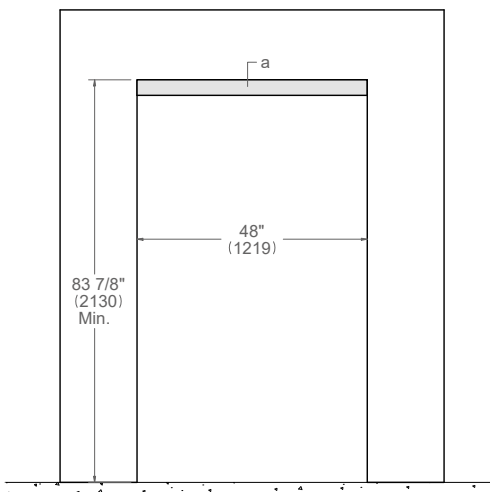

- a: Area to be left clear for the anti-tipping brackets – 48"x4" (1219x100mm)
- b: Depth includes kitchen cabinet front panel.
- c: Optional 48 inch bridge toe kick accessory is available. For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.

No additional accessories are needed.



54" Double Configurations

Flush installation

POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23

REF24FCPIX(L/R)/23

REF30RCPR(L/R)/23

REF24FCIPR(L/R)/23

REF30RCPIX(L/R)/23

REF18WCPIX(L/R)/23

REF30RCPR(L/R)/23

REF18WCPR(L/R) /23

REF36RCPIX(L/R)/23

REF18FCPIX(L/R)/23

REF36RCPR(L/R)/23

REF18FCIPR(L/R)/23

REF36RCPIX(L/R)/23

REF18WCPIX(L/R)/23


REF36RCPR(L/R)/23

REF18WCPR(L/R)/23

TOP VIEW ^b



FRONT VIEW

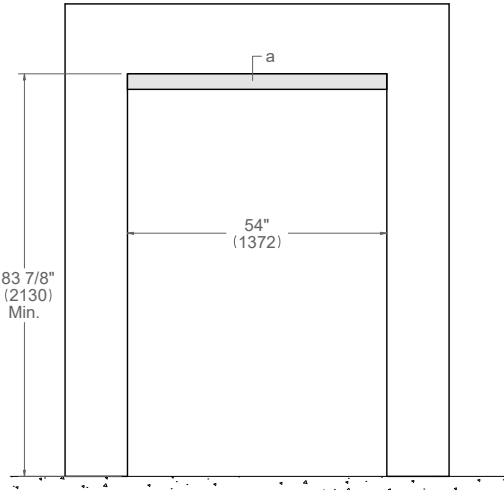

a: Area to be left clear for the anti-tipping brackets – 54"x4" (1372x100mm)
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


60" Double Configurations

Flush installation




POSSIBLE COMBINATIONS


REF30RCPIX(L/R)/23
REF30FCPIX(L/R)/23
REF30RCPR(L/R)/23
REF30FCIPR(L/R)/23



REF36RCPIX(L/R)/23
REF24WCPIX(L/R)/23
REF36RCPR(L/R)/23
REF24WCPR(L/R)/23




REF36RCPIX(L/R)/23
REF24FCPIX(L/R)/23
REF36RCPR(L/R)/23
REF24FCIPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

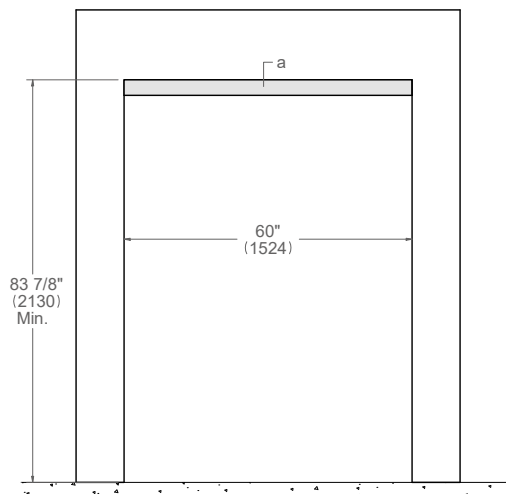

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

60" Triple Configurations





Flush installation



POSSIBLE COMBINATIONS

REF24RCPIX(L/R)/23
REF18FCPIX(L/R)/23
REF18WCPIX(L/R)/23


REF24RCPR(L/R)/23
REF18FCIPR(L/R)/23
REF18WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

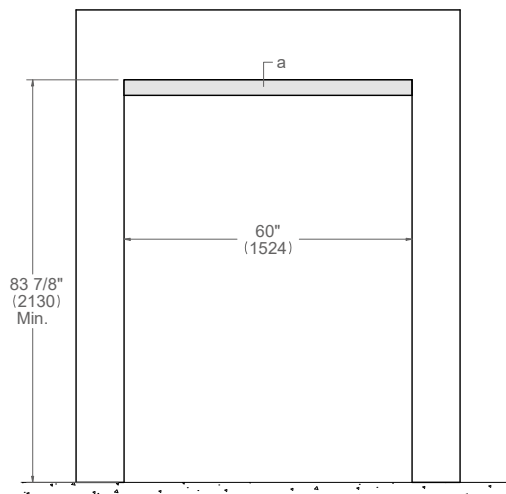

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

66" Triple Configurations





Flush installation




POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23
REF18FCPIX(L/R)/23
REF18WCPIX(L/R)/23


REF30RCPR(L/R)/23
REF18FCPR(L/R)/23
REF18WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

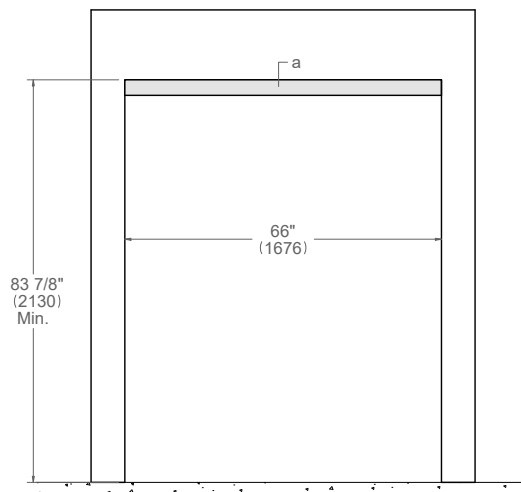

a: Area to be left clear for the anti-tipping brackets – 66"x4" (1676x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.





72" Triple Configurations

Flush installation



POSSIBLE COMBINATIONS


- REF24RCPIX(L/R)/23
- REF24FCPIX(L/R)/23
- REF24WCPIX(L/R)/23
- REF24RCPR(L/R)/23
- REF24FCIPR(L/R)/23
- REF24WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

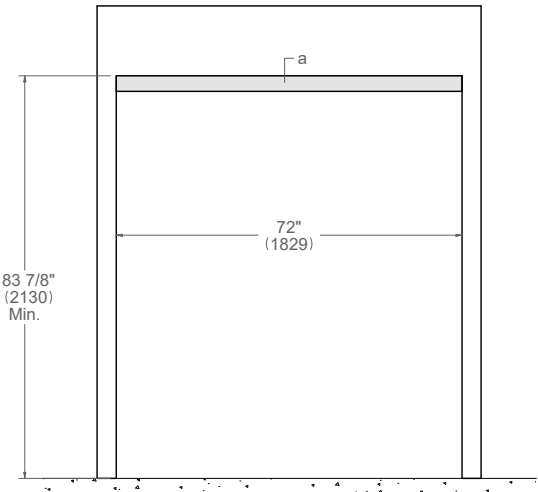

a: Area to be left clear for the anti-tipping brackets – 72"x4" (1829x100mm)
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

78" Triple Configurations





Flush installation



POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23
REF24FCPIX(L/R)/23
REF24WCPIX(L/R)/23


REF30RCPR(L/R)/23
REF24FCIPR(L/R)/23
REF24WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

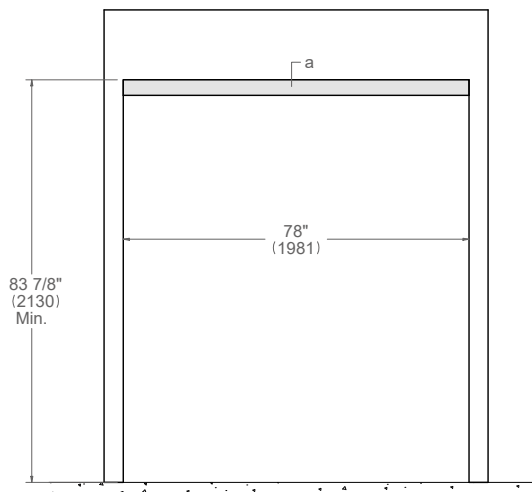

a: Area to be left clear for the anti-tipping brackets – 78"x4" (1981x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.


84" Triple Configurations

Flush installation




POSSIBLE COMBINATIONS

REF36RCPIX(L/R)/23
REF30FCIPIX(L/R)/23
REF18WCPIX(L/R)/23




REF36RCPR(L/R)/23
REF30FCIPR(L/R)/23
REF18WCPR(L/R)/23

REF30RCPIX(L/R)/23
REF30FCIPIX(L/R)/23
REF24WCPIX(L/R)/23




REF30RCPR(L/R)/23
REF30FCIPR(L/R)/23
REF24WCPR(L/R)/23

REF36RCPIX(L/R)/23
REF24FCIPIX(L/R)/23
REF24WCPIX(L/R)/23




REF36RCPR(L/R)/23
REF24FCIPR(L/R)/23
REF24WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

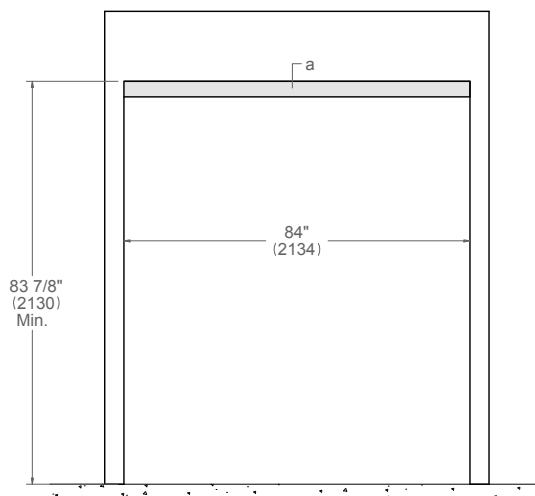

a: Area to be left clear for the anti-tipping brackets – 84"x4" (2134x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.


90" Triple Configurations

Flush installation






POSSIBLE COMBINATIONS ^c

REF36RCPIX(L/R)/23
REF30FCPIX(L/R)/23
REF24WCPIX(L/R)/23




REF36RCPR(L/R)/23
REF30FCIPR(L/R)/23
REF24WCPR(L/R)/23



TOP VIEW ^b



FRONT VIEW

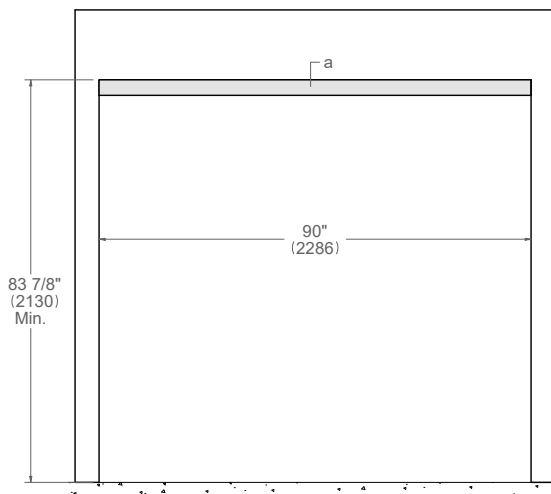

a: Area to be left clear for the anti-tipping brackets – 90"x4" (2286x100mm)

b: Depth includes kitchen cabinet front panel.

c: Optional 42 inch bridge toe kick accessory is available.
For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


Custom Door Panel



REAR PANEL DRILLING

WINE COLUMN
DOOR WINDOW
DIMENSIONS

CUSTOM HANDLES
MOUNTING AREA

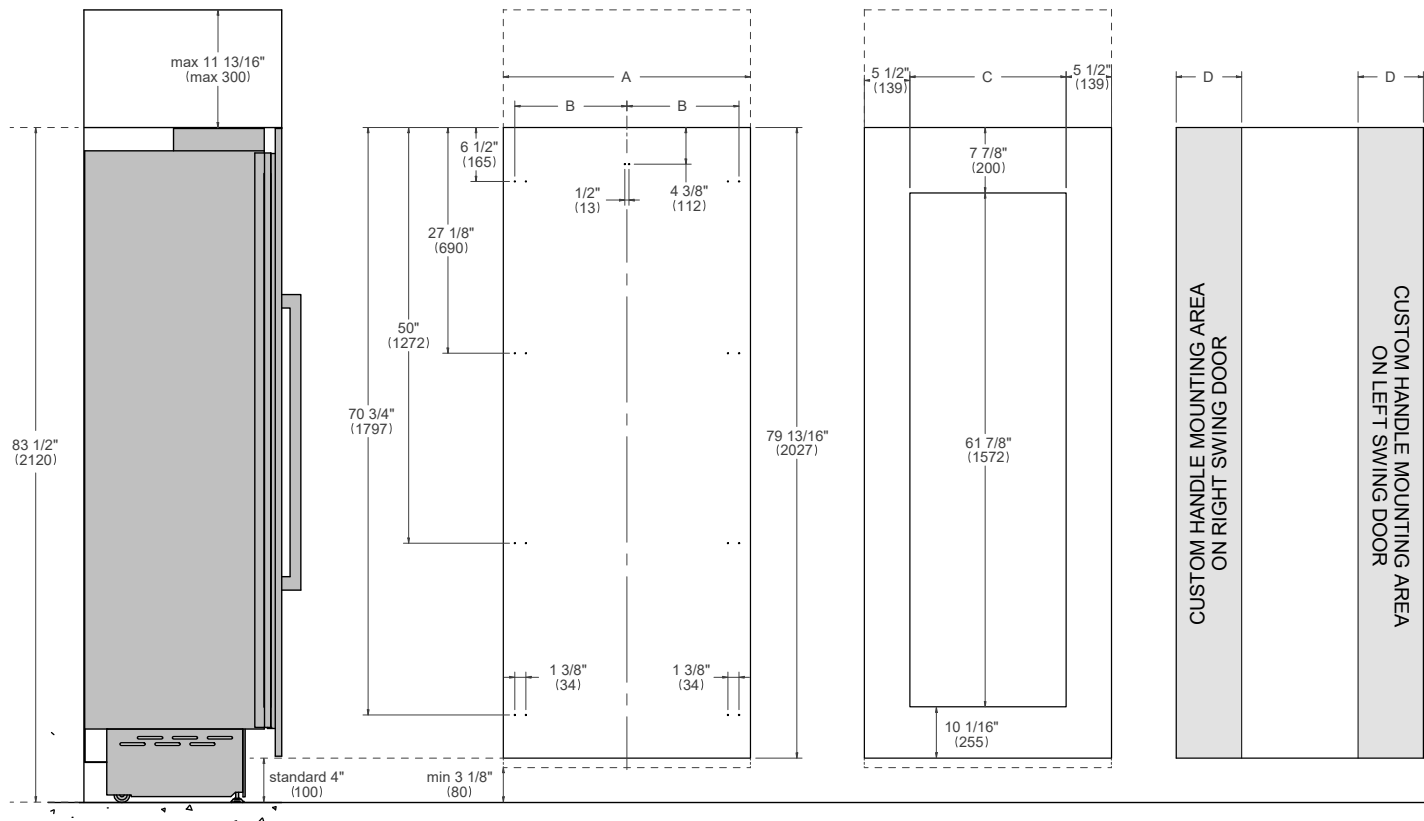


	36"	30"	24"	18"
A	35 3/4" (908)	29 3/4" (756)	23 3/4" (604)	17 3/4" (451)
B	16 1/2" (418)	13 1/2" (343)	10 7/8" (275)	7 7/8" (200)
C	—	—	12 7/8" (327)	6 7/8" (177)
D	7 1/8" (182)	6" (152)	4 3/4" (121)	3 5/8" (92)

Dimensions in parentheses are millimeters unless otherwise specified.


Recommended Installations



RECOMMENDED INSTALLATIONS

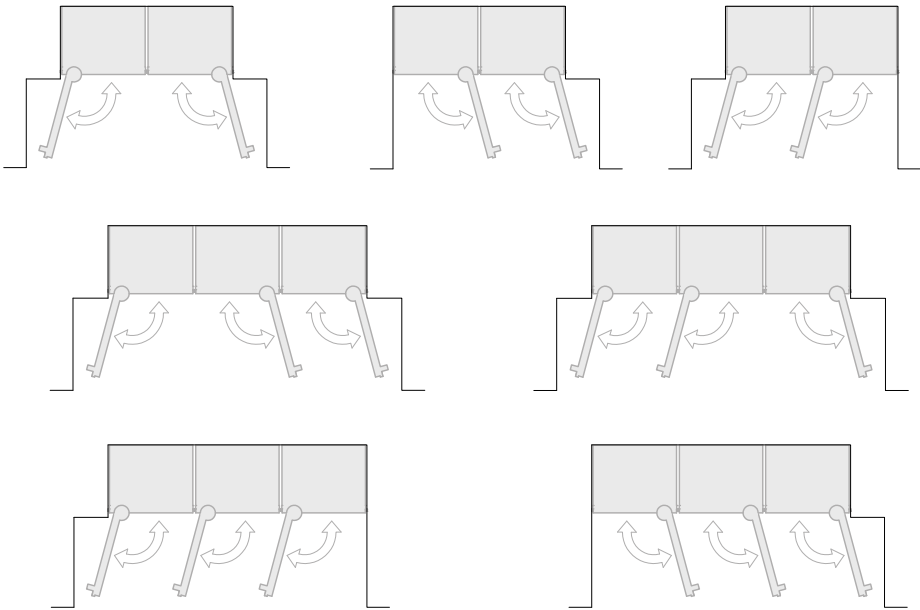


NOT RECOMMENDED INSTALLATIONS

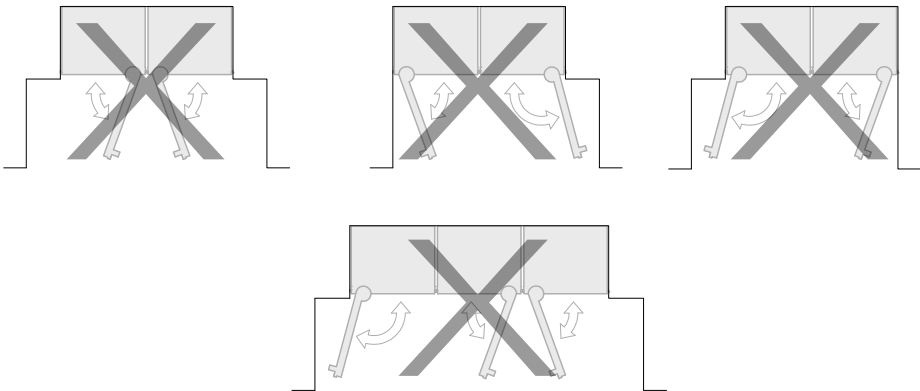


Refrigeration Handles




**PROFESSIONAL SERIES
PROHKCOL**




**MASTER SERIES
MASHKCOL**




**HERITAGE SERIES
HERHKCOL**



**BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR**

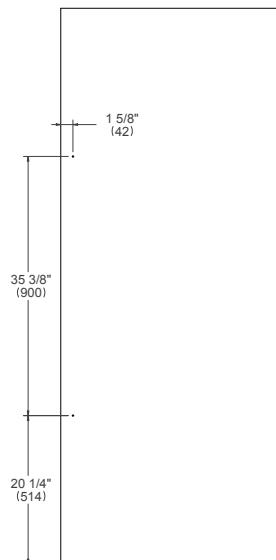

**BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR**

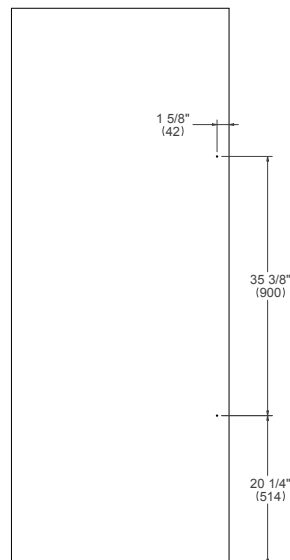


HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at www.encompass.com


Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit. Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

Toekick Panel

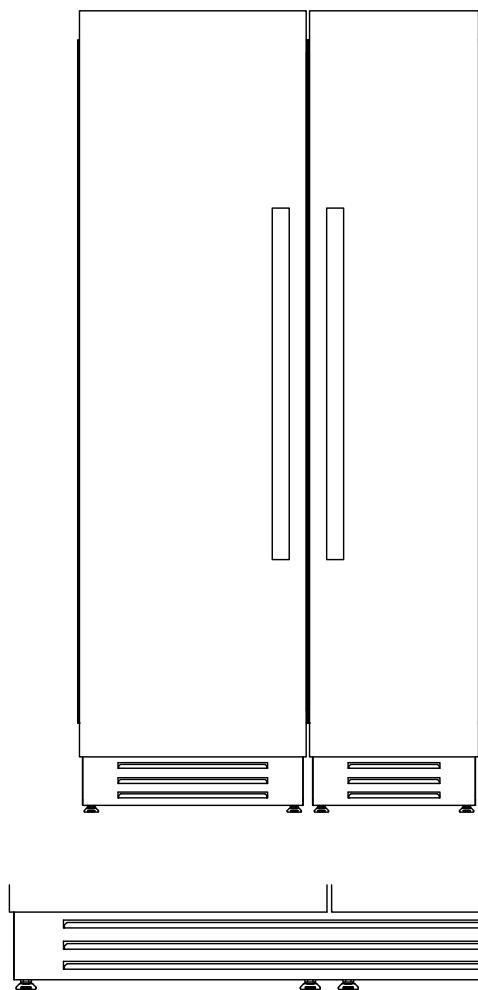

Part number 901560

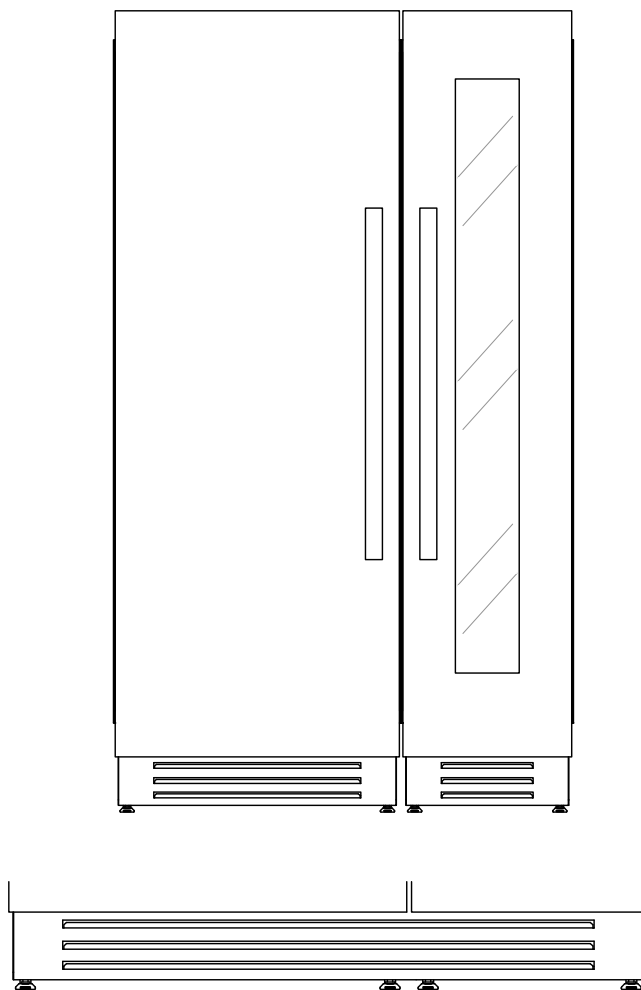

Part number 901561

Installation of multiple column units with a continuous cabinet toe kick are possible. Details are provided in the Bertazzoni Columns installation manual.

BUILT-IN BOTTOM MOUNT REFRIGERATORS




These refrigerators from the T tier are masterpieces of design, styled to reflect Bertazzoni's meticulous attention to detail. They are practical, too - incorporating the latest technology to retain the nutritional value, vitamins, minerals, and texture of your food for longer. Designed for true flush installation in a standard depth cabinet, they are available in both stainless steel and panel-ready models for a seamless installation with any adjacent cabinetry and can be installed side-by-side, doubling your refrigerator space.


Add the finishing touch with Professional, Master, or Heritage Series handles to match the other appliances in your kitchen.

The side-by-side installation kit lets you create clean lines in your kitchen. "Lift and swing" hinges are available on 36" and 30" models to allow a minimal vertical gap of 1/8" between adjacent front cabinet panels.

36"
Panel Installed and
Panel Ready



30"
Panel Installed and
Panel Ready





36" Bottom Mount Panel Installed

Dimensions



REF36BMBIXLT left hinge
REF36BMBIXRT right hinge


Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

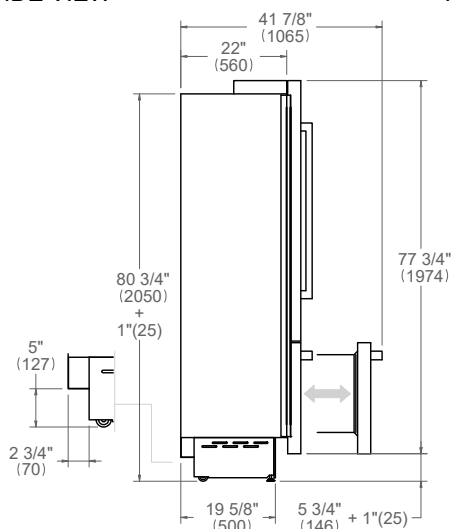


FRONT VIEW

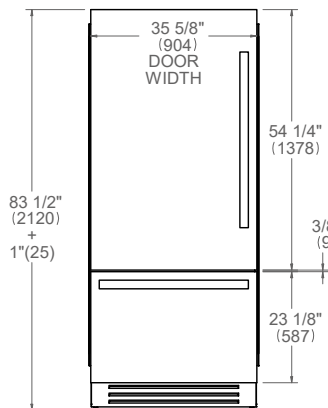


TOP VIEW

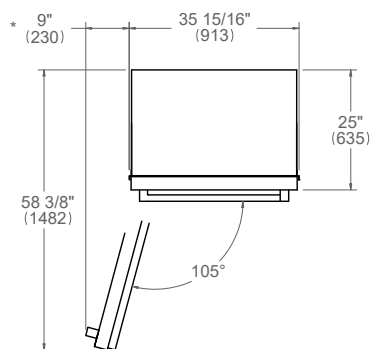


SIDE VIEW

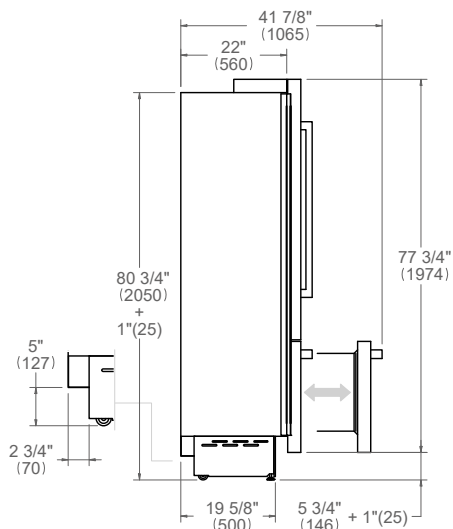

FRONT VIEW

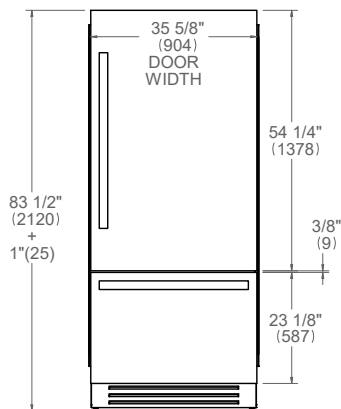

TOP VIEW

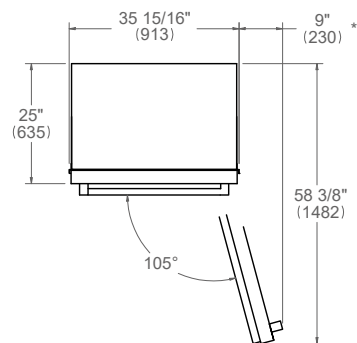

* Maximum Overall Handle Dimension
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

36" Bottom Mount Panel Installed

Installation requirements



CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg)
------------------------	-------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 550 W 4.8 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

36" Bottom Mount Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

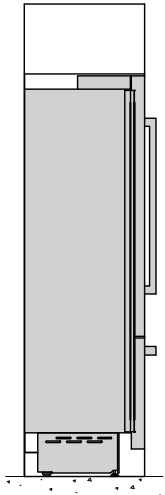

FRONT VIEW

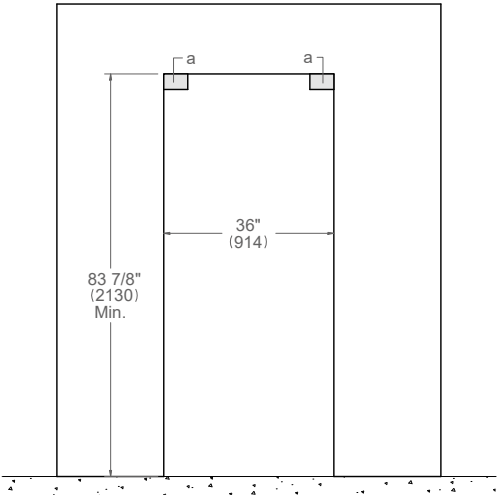

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

36" Bottom Mount Panel Ready

Dimensions



REF36BMBIPLT left hinge
REF36BMBIPRT right hinge


Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

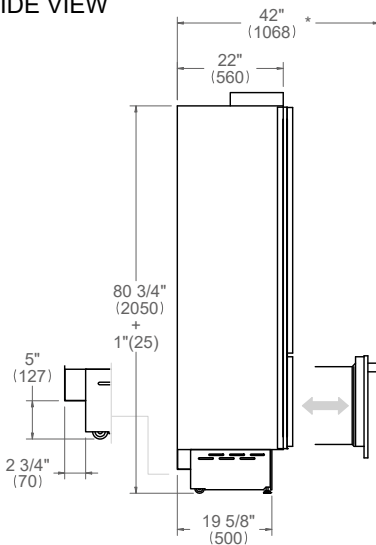


FRONT VIEW

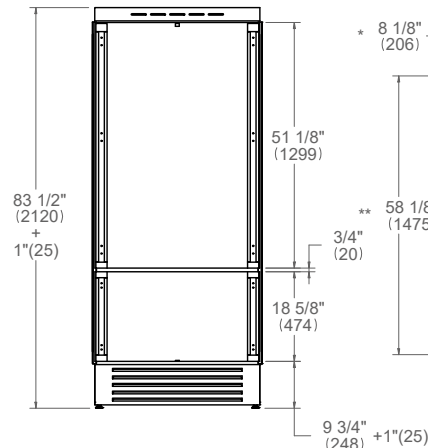


TOP VIEW

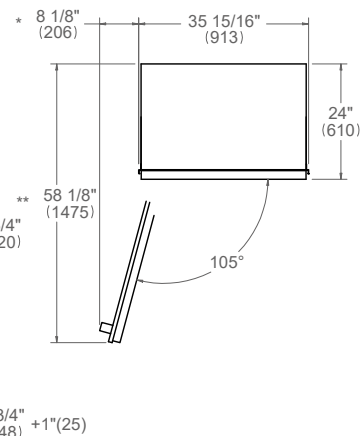


SIDE VIEW

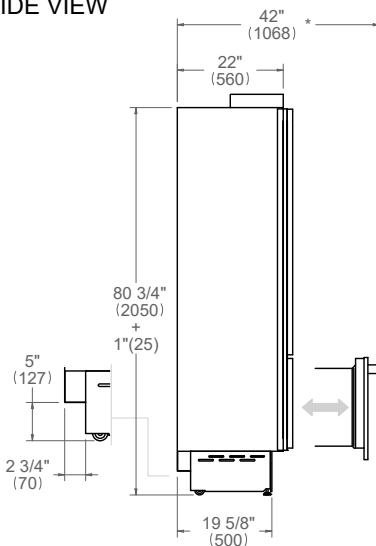

FRONT VIEW

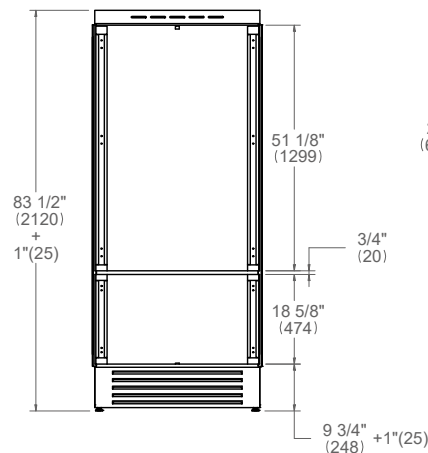

TOP VIEW

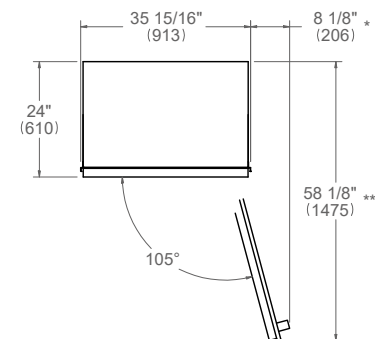

* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 99

For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

36" Bottom Mount Panel Ready

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg)
------------------------	------------------


For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.
Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 550 W 4.8 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

36" Bottom Mount Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

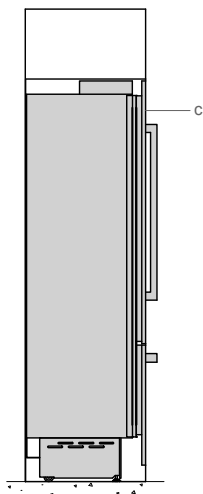

FRONT VIEW

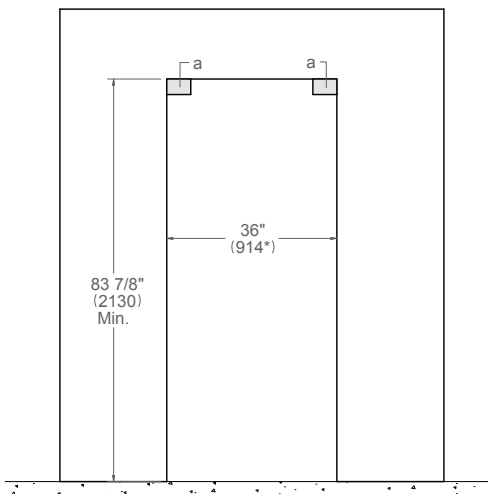

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

* 36 1/8" (917) for framed-in installation.

30" Bottom Mount Panel Installed

Dimensions



REF30BMBIXLT left hinge
REF30BMBIXRT right hinge


Handle choices

Professional Series: PROHK30PI


Master series: MASHK30PI

Heritage Series: HERHK30PI


SIDE VIEW

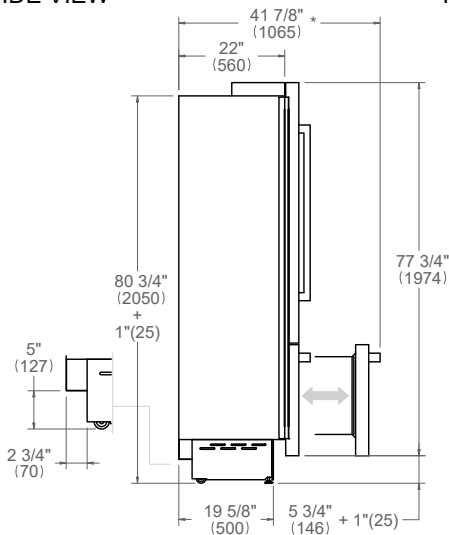


FRONT VIEW

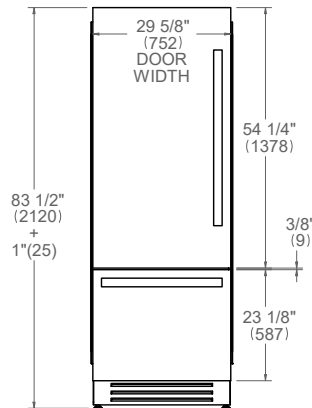


TOP VIEW




SIDE VIEW

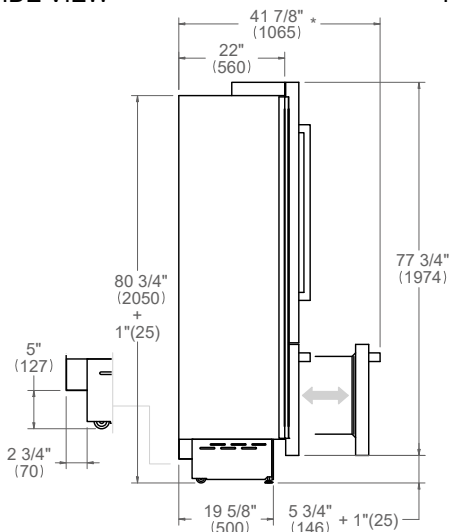

FRONT VIEW

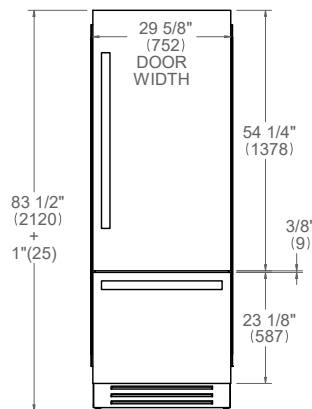

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Installed

Installation requirements



CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 470 W 4.1 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

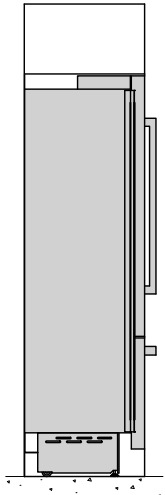

FRONT VIEW

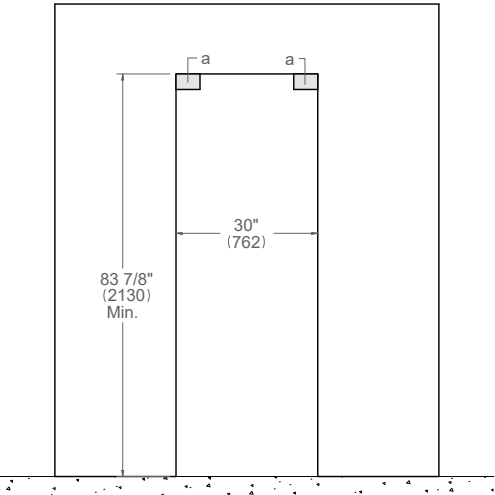

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

30" Bottom Mount Panel Ready

Dimensions



REF30BMBIPLT left hinge
REF30BMBIPRT right hinge


Handle choices

Professional Series: PROHK30PI


Master series: MASHK30PI

Heritage Series: HERHK30PI


SIDE VIEW

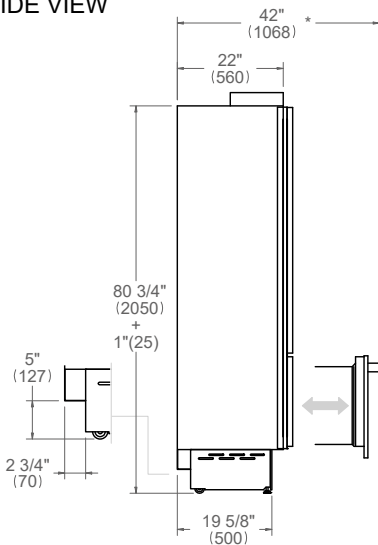


FRONT VIEW

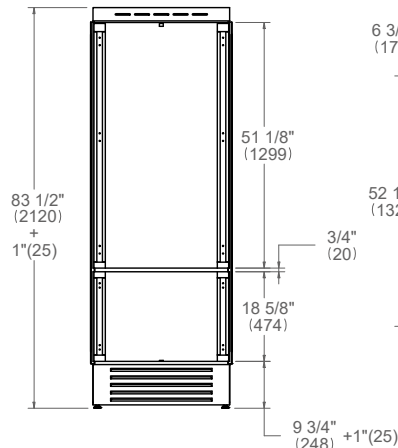


TOP VIEW




SIDE VIEW

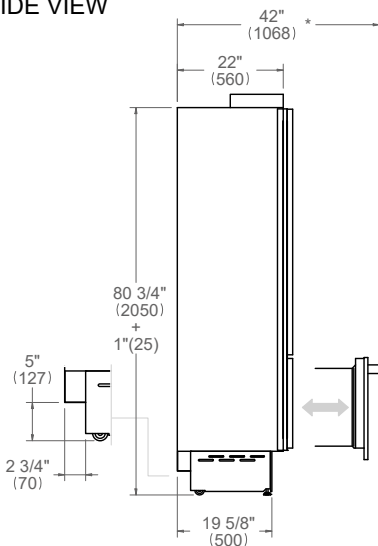

FRONT VIEW

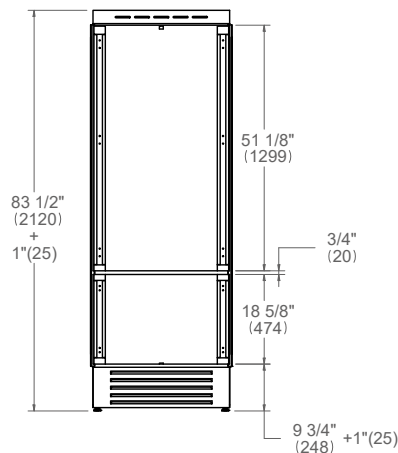

TOP VIEW



* Maximum Overall Handle Dimension

** 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 99

For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Ready

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	------------------


For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.
Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 470 W 4.1 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

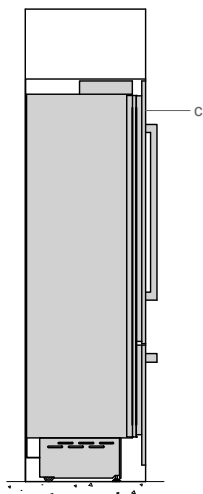

FRONT VIEW

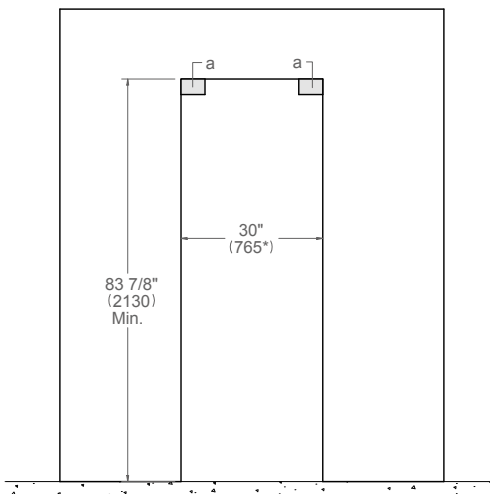

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

* 30 1/8" (765) for framed-in installation.

BOTTOM MOUNT MULTIPLE INSTALLATIONS





Bottom Mount Multiple Installations

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.

Panel can have thickness ranging between $\frac{3}{4}$ " (19 mm) and 1 $\frac{1}{8}$ " (28 mm).


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a $\frac{1}{4}$ " waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is $\frac{3}{4}$ " diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.

60" Bottom Mount Double Configurations


Flush installation



POSSIBLE COMBINATIONS


REF30BMBIXRT
REF30BMBIXLT

REF30BMBIPRT
REF30BMBIPLT




REF30BMBIXRT
REF30BMBIXRT

REF30BMBIPRT
REF30BMBIPRT



REF30BMBIXLT
REF30BMBIXLT


REF30BMBIPLT
REF30BMBIPLT



TOP VIEW ^b



FRONT VIEW

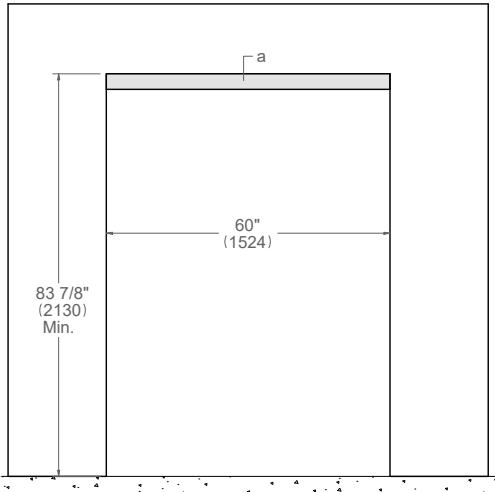

a Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.




66" Bottom Mount Double Configurations


Flush installation

POSSIBLE COMBINATIONS


REF30BMBIXRT
REF36BMBIXLT
REF30BMBIXLT
REF36BMBIXRT
REF30BMBIPRT
REF36BMBIPLT
REF30BMBIPLT
REF36BMBIPRT



REF30BMBIXRT
REF36BMBIXRT
REF30BMBIPRT
REF36BMBIPRT




REF30BMBIXLT
REF36BMBIXLT
REF30BMBIPLT
REF36BMBIPLT



TOP VIEW ^b



FRONT VIEW

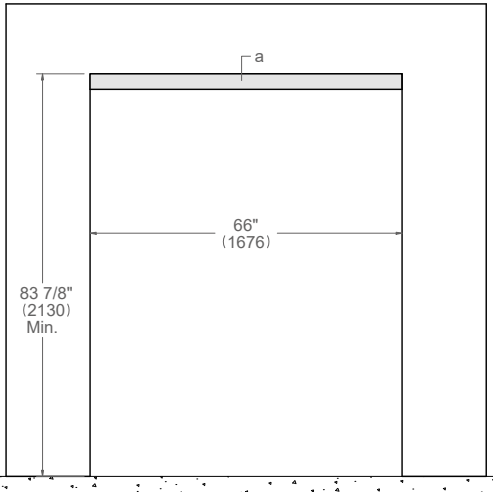

a Area to be left clear for the anti-tipping brackets – 66"x4" (1676x100mm)
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

72" Bottom Mount Double Configurations


Flush installation



POSSIBLE COMBINATIONS


REF36BMBIXRT
REF36BMBIXLT

REF36BMBIPRT
REF36BMBIPLT




REF36BMBIXRT
REF36BMBIXRT

REF36BMBIPRT
REF36BMBIPRT



REF36BMBIXLT
REF36BMBIXLT


REF36BMBIPLT
REF36BMBIPLT



TOP VIEW ^b



FRONT VIEW

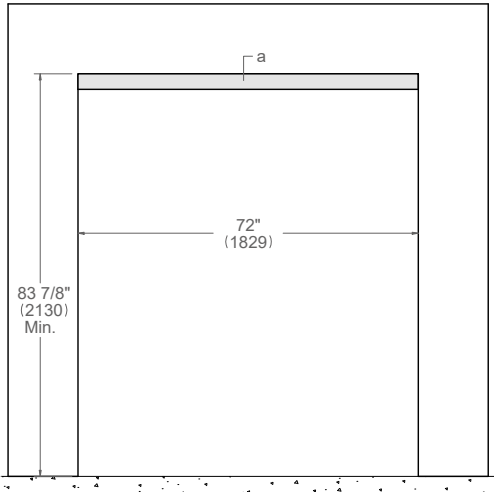

a Area to be left clear for the anti-tipping brackets – 72"x4" (1829x100mm)
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


48" Double Configurations*

Flush installation




POSSIBLE COMBINATIONS ^c

REF30BMBIPRT
REF18WCPRL




REF30BMBIPLT
REF18WCPRR



TOP VIEW ^b



FRONT VIEW

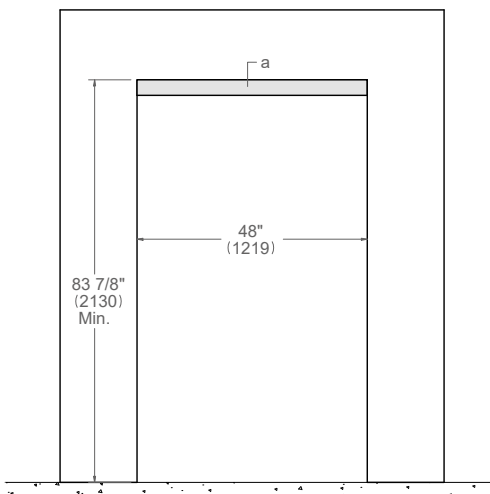

a: Area to be left clear for the anti-tipping brackets – 48"x4" (1219x100mm)

b: Depth includes kitchen cabinet front panel.

c: Optional 48 inch bridge toe kick accessory is available.
For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


54" Double Configurations*

Flush installation




POSSIBLE COMBINATIONS


REF30BMBIPRT
REF24WCPRL




REF30BMBIPLT
REF24WCPRR



REF36BMBIPRT
REF18WCPRL




REF36BMBIPLT
REF18WCPRR



TOP VIEW ^b



FRONT VIEW

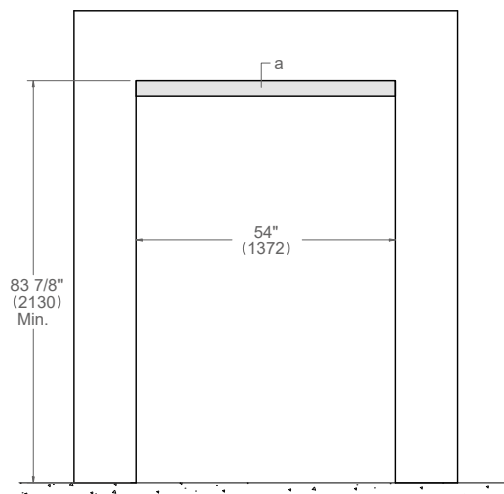

a Area to be left clear for the anti-tipping brackets – 54"x4" (1372x100mm)

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.


60" Double Configurations*

Flush installation




POSSIBLE COMBINATIONS

REF36BMBIPRT
REF24WCPRL




REF36BMBIPLT
REF24WCPRR



TOP VIEW ^b



FRONT VIEW

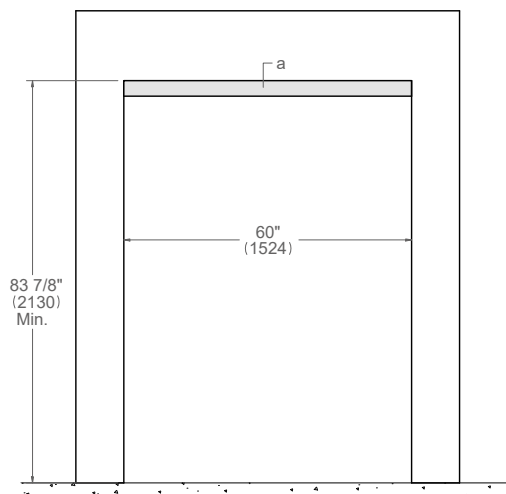

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.


All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

Custom Door Panel




REAR PANEL DRILLING

CUSTOM HANDLES
MOUNTING AREA

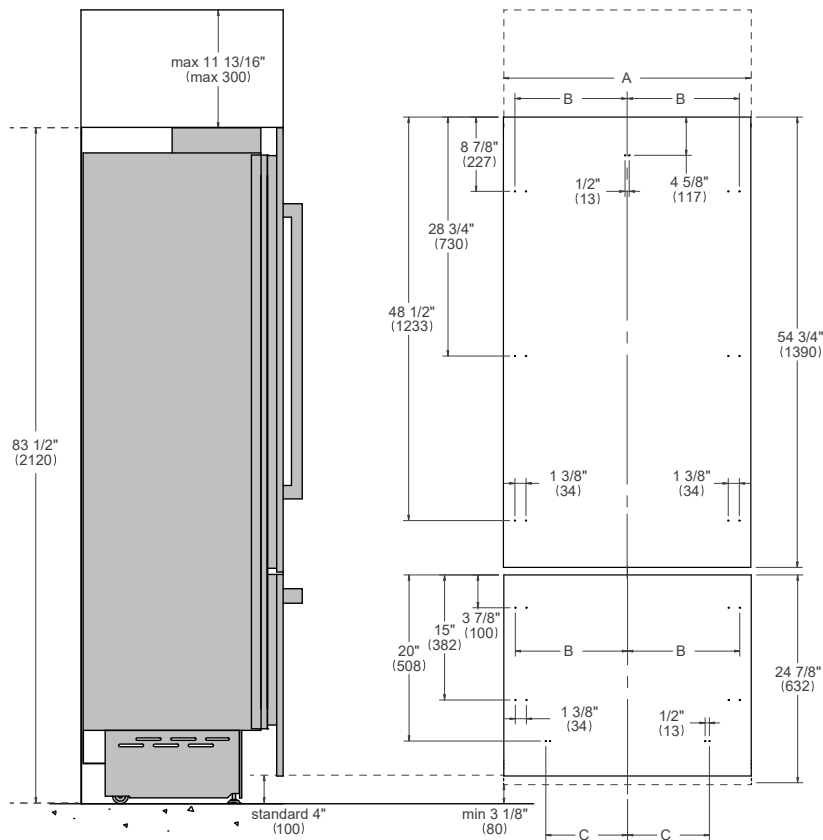

DOOR PANEL

DRAWER PANEL

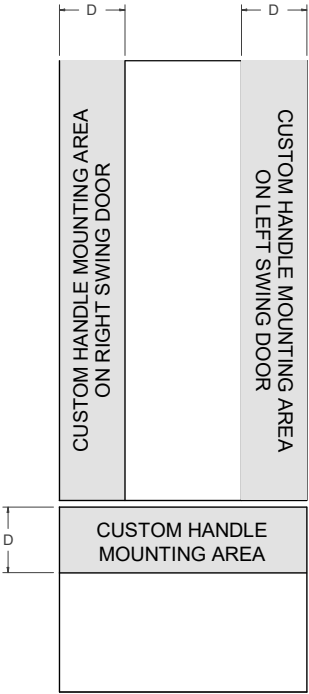


	36"	30"
A	35 3/4" (908)	29 3/4" (756)
B	16 1/2" (418)	13 1/2" (343)
C	14" (354.5)	11" (279.5)
D	7 1/8" (182)	6" (152)

Dimensions in parentheses are millimeters unless otherwise specified.


Refrigeration Handles




PROFESSIONAL SERIES PROHK36PI PROHK30PI




MASTER SERIES MASHK36PI MASHK30PI




HERITAGE SERIES HERHK36PI HERHK30PI



BERTAZZONI HANDLES DRILLING ON RIGHT SWING DOOR

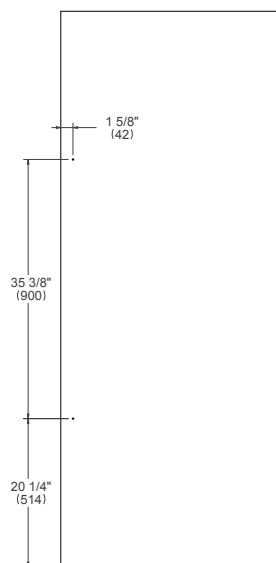

BERTAZZONI HANDLES DRILLING ON LEFT SWING DOOR

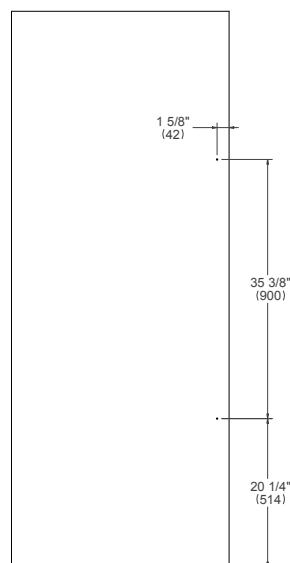

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at www.encompass.com

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

V TIER LINE UP



BUILT-IN REFRIGERATOR COLUMNS



BUILT-IN COLUMNS

Experience the ultimate design and technology with Bertazzoni's V tier refrigerators and freezer columns. These masterpieces of style boast high-quality materials and attention to detail in all respects. The reversible panel-ready doors^(*) are mounted on cutting-edge Hettich hinges, providing a seamless and weightless range of motion. With versatile installation options, you can create elegant configurations of the refrigerator and freezer columns. You can also customize your columns with optional stainless panels, handles, and finishes, available for every Series.

30"
Panel Ready



(*) Exept 18" models.




30" Refrigerator Column Panel Ready

Dimensions




REF30RCBPNV reversible hinges


SIDE VIEW

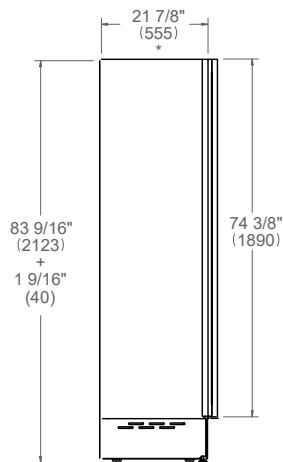


FRONT VIEW

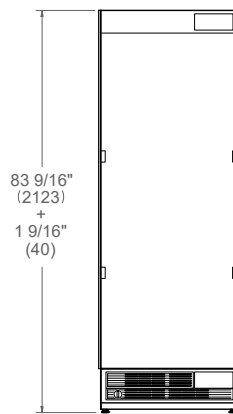


TOP VIEW

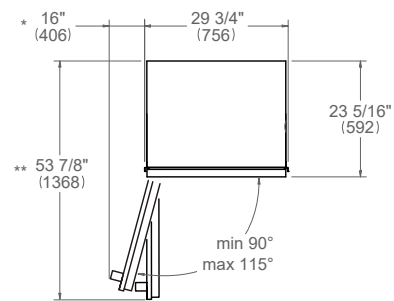


SIDE VIEW

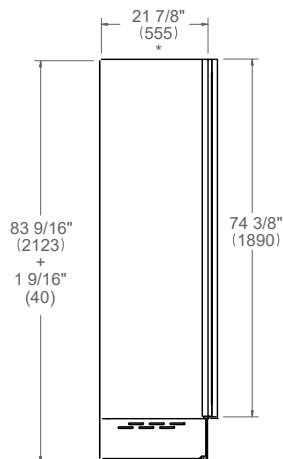

FRONT VIEW

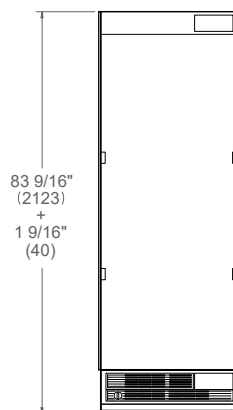

TOP VIEW

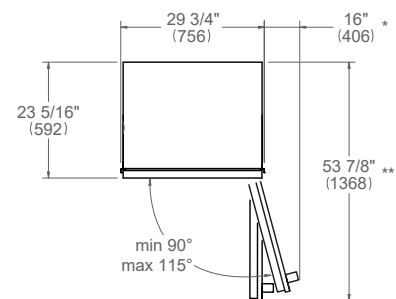

* Depth without door

** Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 116

For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel is available – SKU # SP30CX.

30" Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

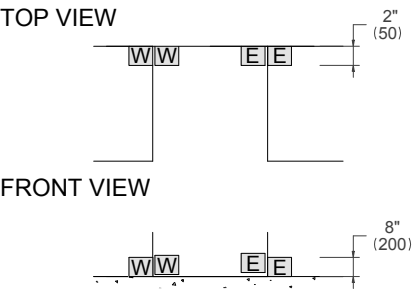

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 112 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

PLUMBING REQUIREMENT

Bertazzoni Refrigerator Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Refrigerator Column Panel Ready


Flush installation




TOP VIEW ^b



SIDE VIEW

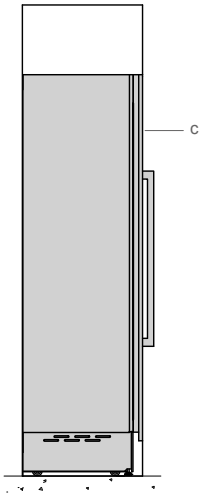

FRONT VIEW

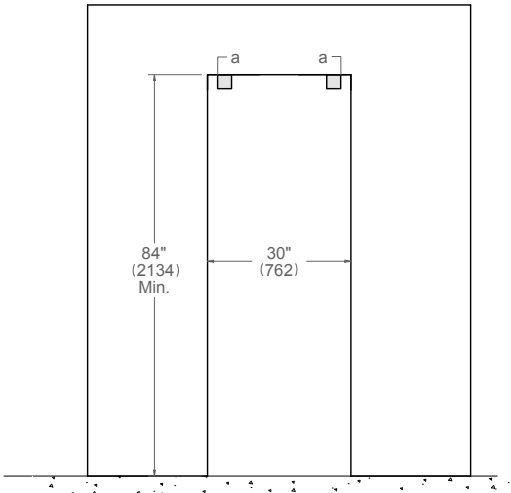

(a) Anti-tipping brackets included with appliance – 4"x3/16"
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

BUILT-IN FREEZER COLUMNS



18"
Panel Ready






18" Freezer Column Panel Ready

Dimensions




REF18FCBIPRV left hinge
REF18FCBIPRV right hinge


SIDE VIEW

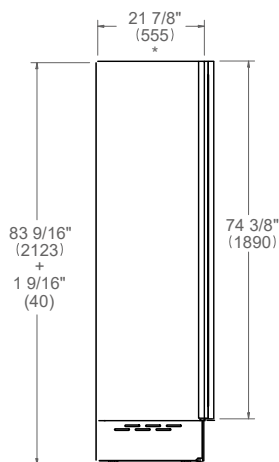


FRONT VIEW

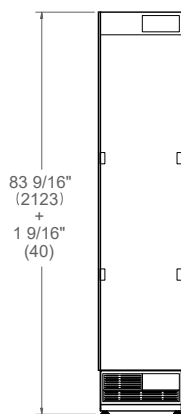


TOP VIEW




SIDE VIEW

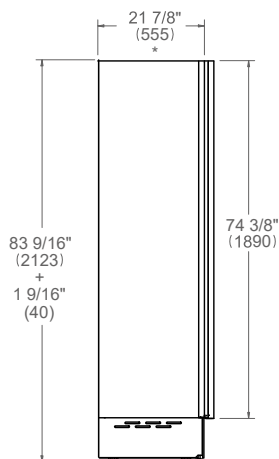

FRONT VIEW

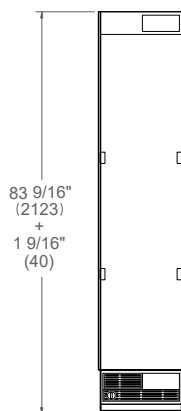

TOP VIEW



* Depth without door

** Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 116

For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel is available – SKU # SP18CX.

18" Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

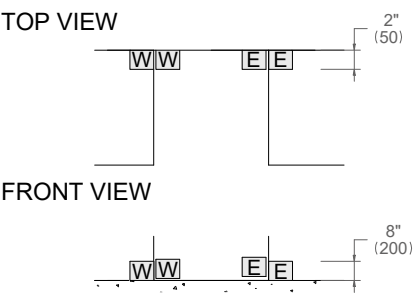

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 160 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.


Dimensions in parentheses are millimeters unless otherwise specified.

18" Freezer Column Panel Ready


Flush installation




TOP VIEW ^b



SIDE VIEW

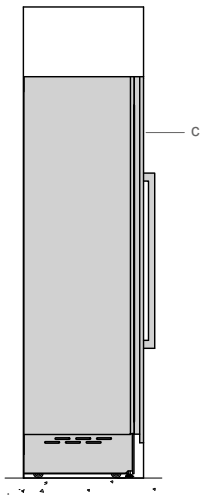

FRONT VIEW

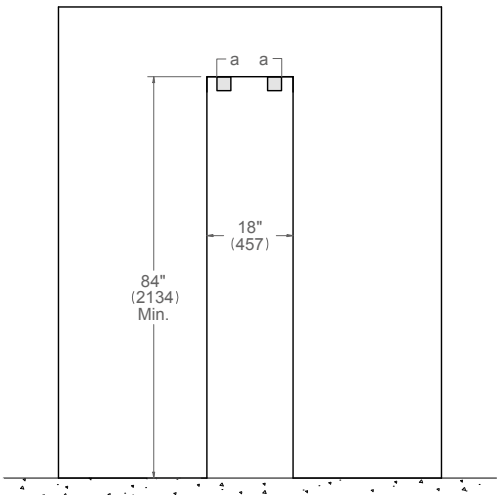

(a) Anti-tipping brackets included with appliance – 4"x3/16"
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

COLUMNS MULTIPLE INSTALLATIONS





Multiple installations

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation.

Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate 15 Amp circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENTS

Bertazzoni Refrigerator and Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.

The appliances must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


48" Double Configurations

Flush installation




POSSIBLE COMBINATIONS


REF30RCBPNV
REF18FCBIP(R/L)V



TOP VIEW ^b

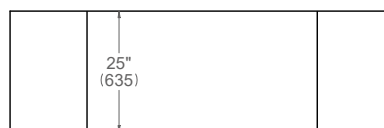

FRONT VIEW

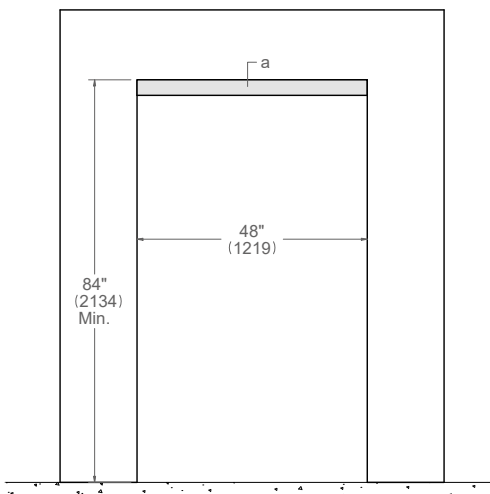


a: Anti-tipping brackets included with appliance – 48"x3/16"
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.



**CUSTOM HANDLES
MOUNTING AREA**

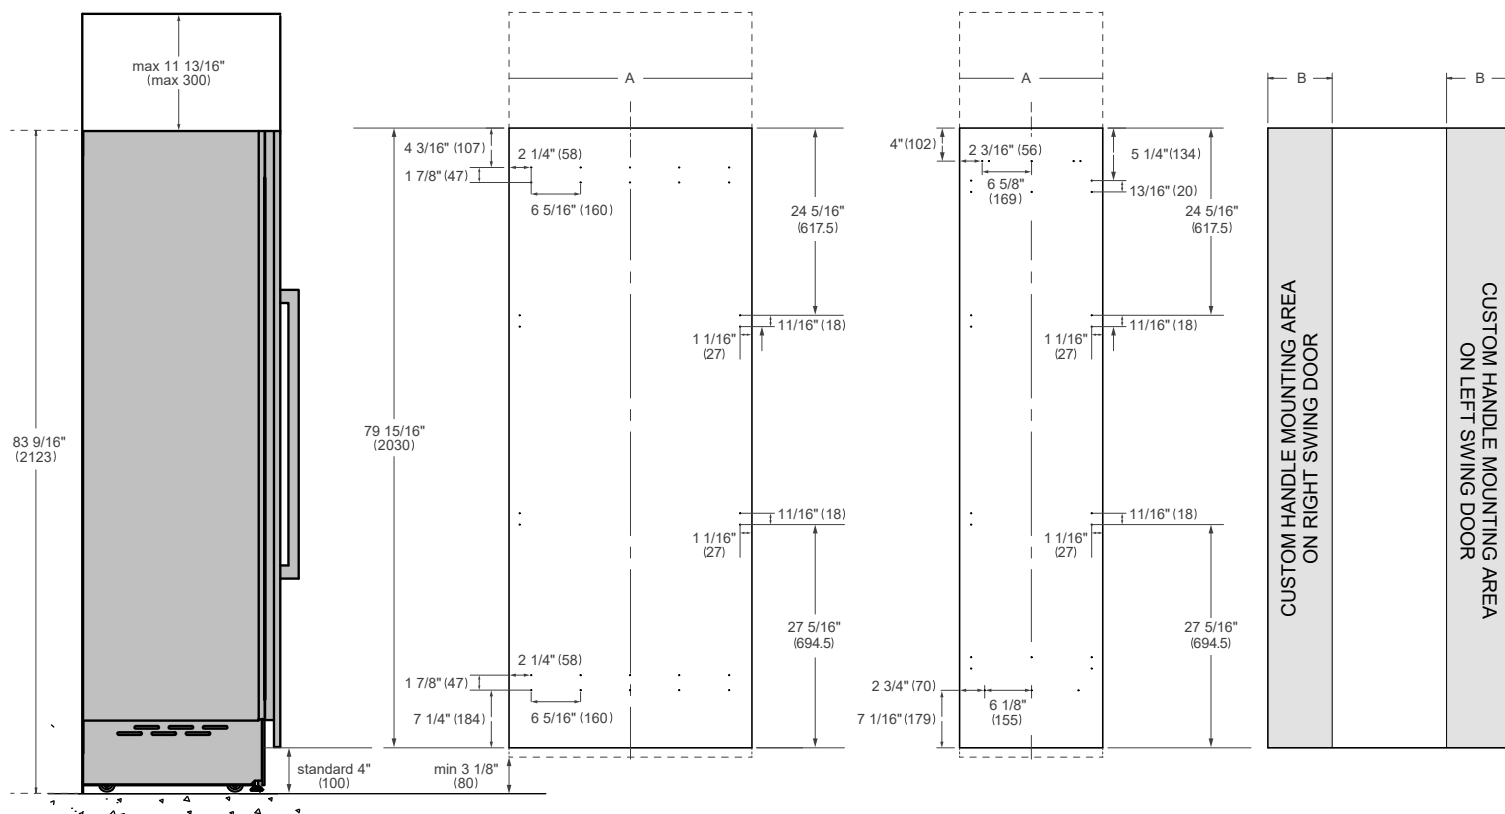


	30"	18"
A	29 3/4" (756)	17 3/4" (451)
B	6" (152)	3 5/8" (92)

Dimensions in parentheses are millimeters unless otherwise specified.




Recommended Installations



RECOMMENDED INSTALLATIONS




NOT RECOMMENDED INSTALLATIONS




Refrigeration Handles




**PROFESSIONAL SERIES
PROHKCOL**




**MASTER SERIES
MASHKCOL**




**HERITAGE SERIES
HERHKCOL**



**BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR**

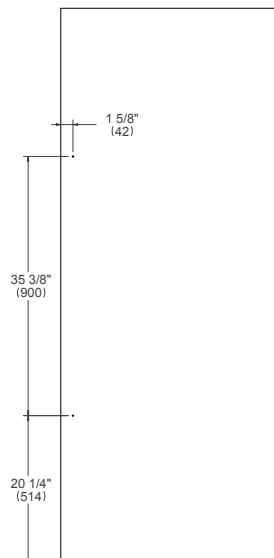

**BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR**

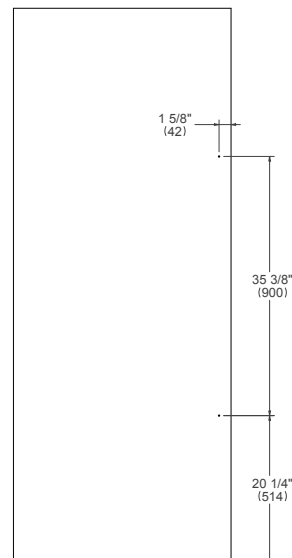

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at www.encompass.com

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


BUILT-IN BOTTOM MOUNT REFRIGERATORS



Experience the perfect combination of design and technology with Bertazzoni's Premium tier refrigerators. These masterpieces of style reflect our meticulous attention to detail and are designed to retain your food's nutritional value, vitamins, minerals, and texture for longer.

With a true flush installation in a standard depth cabinet and reversible panel-ready doors, they seamlessly integrate with any adjacent cabinetry. You can even install them side-by-side with CTXV connection kit, doubling your refrigerator space. Customize your refrigerators with optional stainless panels and Professional, Master, or Heritage Series handles to match your other kitchen appliances. Our 36" and 30" bottom-mount models feature Hettich hinges that allow a minimal vertical gap of 1/8" between adjacent front cabinet panels, creating clean lines in your kitchen.

36"
Panel Ready



30"
Panel Ready





36" Bottom Mount Panel Ready

Dimensions



REF36BMBZPNV reversible hinge


Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

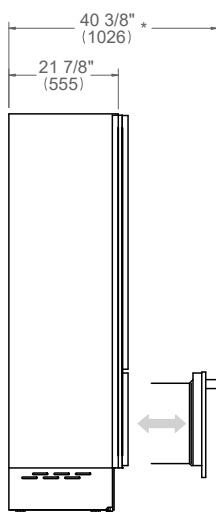


FRONT VIEW

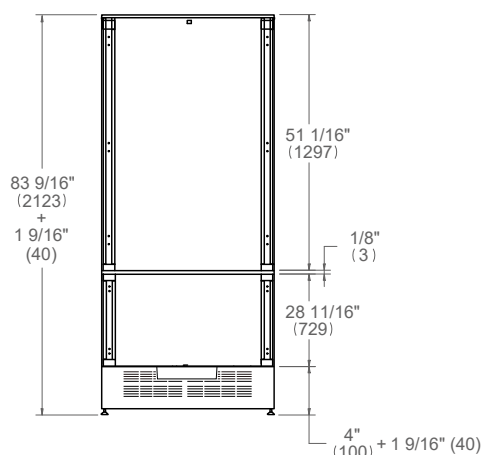


TOP VIEW

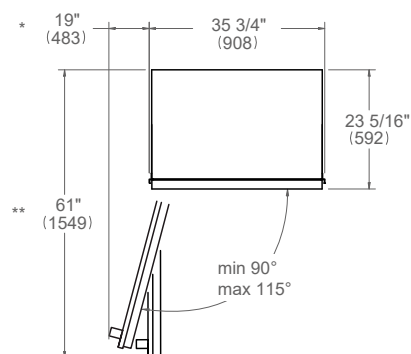


SIDE VIEW

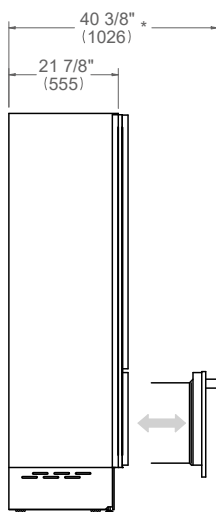

FRONT VIEW

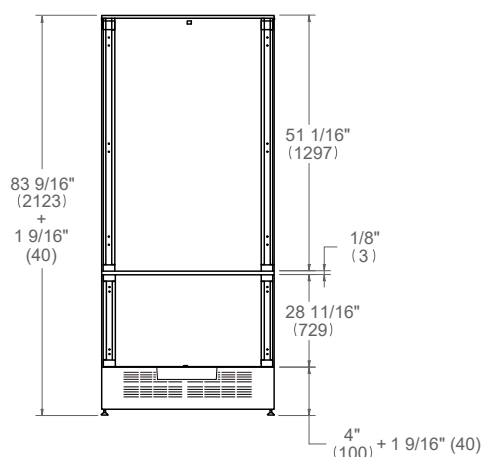

TOP VIEW

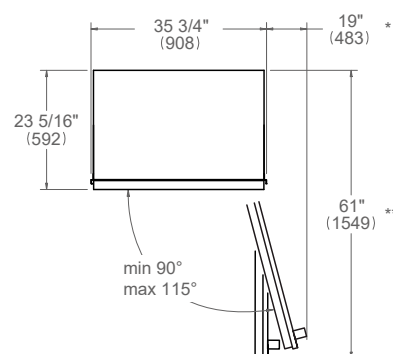

* Maximum Overall Handle Dimension

** 15/16" (24mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel is available - SKU # SP36BMX.

36" Bottom Mount Panel Ready

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1200 lb (544 kg)
------------------------	------------------

For panel ready bottom mount refrigerator, do not exceed the maximum weight of 35 pounds (16 kg) for door panel and 20 pounds (9 kg) for drawer panel.
Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

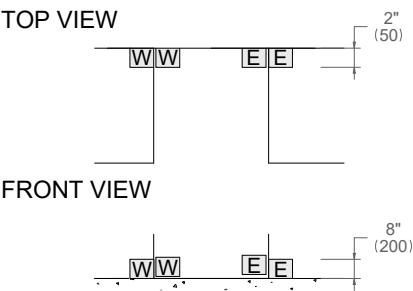

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 120 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 25 to 80 PSI (between 1.7 and 5.5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

36" Bottom Mount Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

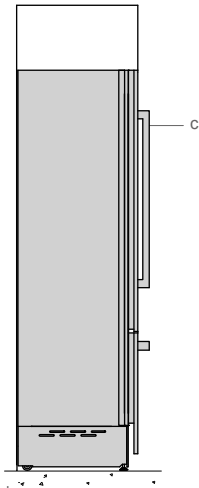

FRONT VIEW

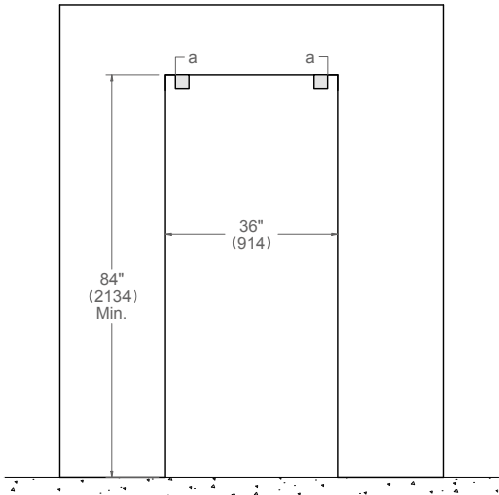

(a) Anti-tipping brackets included with appliance – 4"x3/16"
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Ready

Dimensions



REF30BMBZPNV reversible hinge

REF30BMBPNB reversible hinge


Handle choices

Professional Series: PROHK30PI


Master series: MASHK30PI

Heritage Series: HERHK30PI


SIDE VIEW

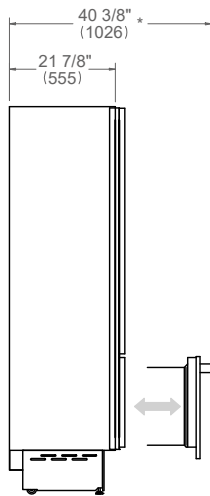


FRONT VIEW

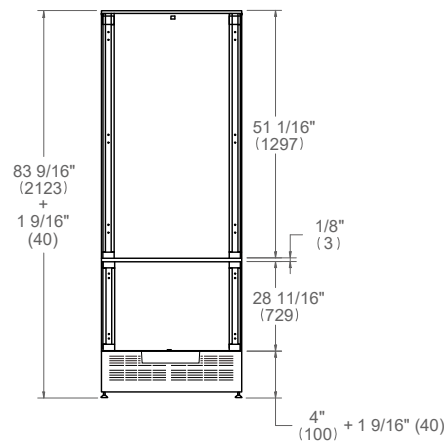


TOP VIEW

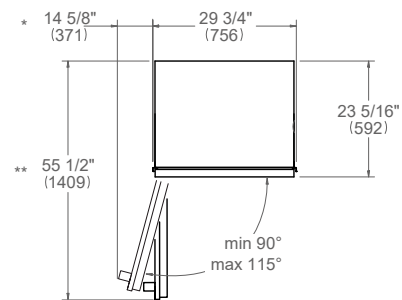


SIDE VIEW

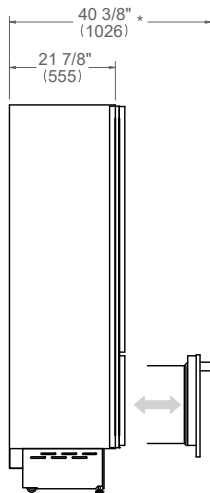

FRONT VIEW

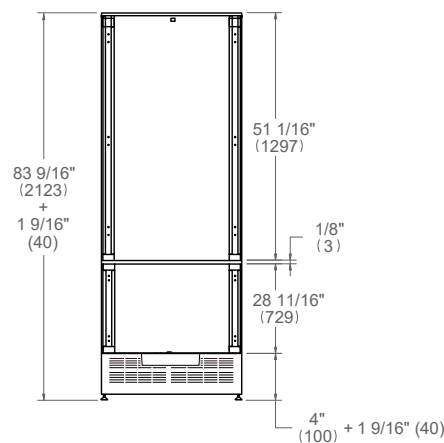

TOP VIEW

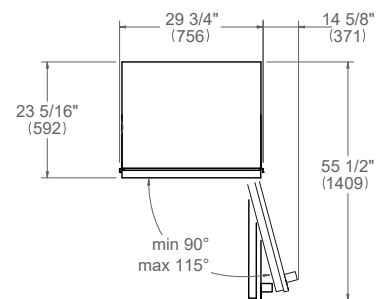

* Maximum Overall Handle Dimension

** 15/16" (24mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel is available - SKU # SP30BMX.

30" Bottom Mount Panel Ready

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1200 lb (544 kg)
------------------------	------------------

For panel ready combi bottom mount, do not exceed the maximum weight of 35 pounds (16 kg) for door panel and 20 pounds (9 kg) for drawer panel.
For a flush installation, cabinet panels should not be thicker than 15/16" (24 mm).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

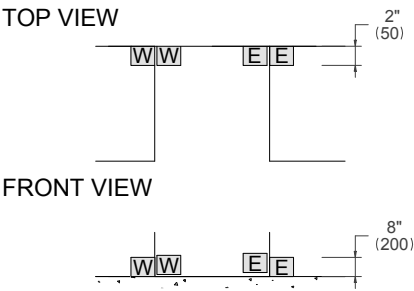

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 120 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).
The system pressure must be between from 25 to 80 PSI (between 1.7 and 5.5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

30" Bottom Mount Panel Ready


Flush installation




TOP VIEW ^b

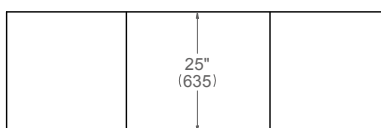

SIDE VIEW

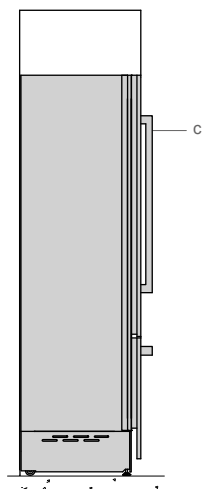

FRONT VIEW

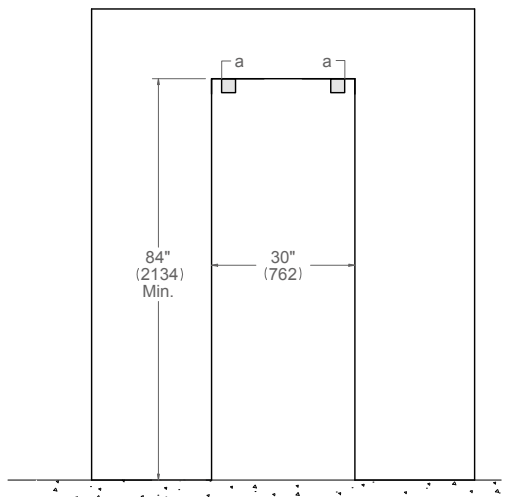

- (a) Anti-tipping brackets included with appliance – 4"x3/16"
- (c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

BOTTOM MOUNTS MULTIPLE INSTALLATIONS





Bottom Mount Multiple installations

Installation requirements



CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 35/44 pounds (16/20 kg) for door panel/s and 20 pounds (9 kg) for drawer panel.

Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENT

The appliances must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.

60" Bottom Mount Double Configurations


Flush installation



POSSIBLE COMBINATIONS

REF30BMBZPNV
REF30BMBZPNV


REF30BMBPNB
REF30BMBPNB



TOP VIEW ^b



FRONT VIEW

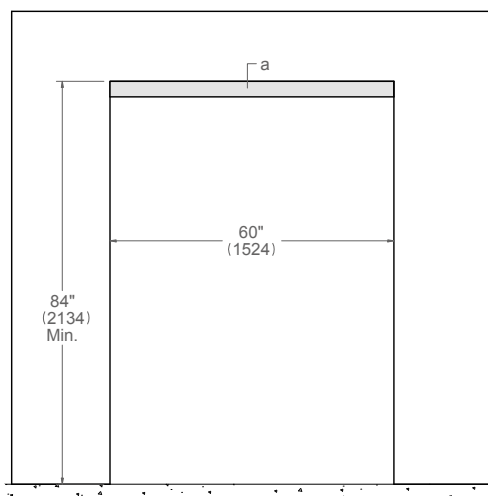

a Anti-tipping brackets included with appliance – 60"x3/16"

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


66" Bottom Mount Double Configurations

Flush installation



POSSIBLE COMBINATIONS


REF30BMBZPNV
REF36BMBZPNV



TOP VIEW ^b



FRONT VIEW

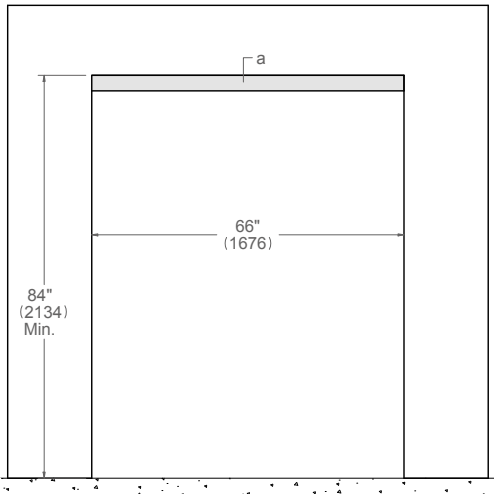

a Anti-tipping brackets included with appliance – 66"x3/16"
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


72" Bottom Mount Double Configurations

Flush installation



POSSIBLE COMBINATIONS


REF36BMBZPNV
REF36BMBZPNV



TOP VIEW ^b



FRONT VIEW

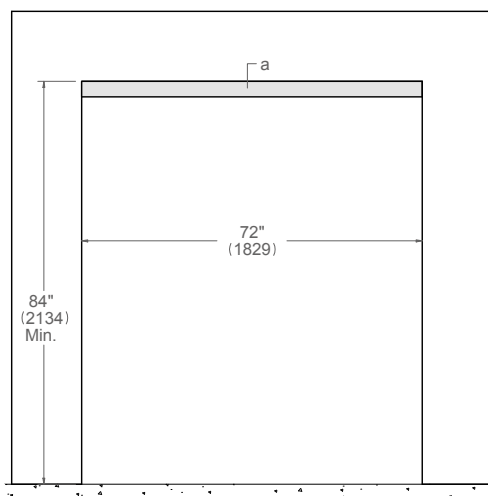

a Anti-tipping brackets included with appliance – 72"x3/16"

b Depth includes kitchen cabinet front panel




Dimensions in parentheses are millimeters unless otherwise specified.

Bottom Mount Custom Door Panel



36" & 30" BOTTOM MOUNT REAR PANEL DRILLING

CUSTOM HANDLES MOUNTING AREA

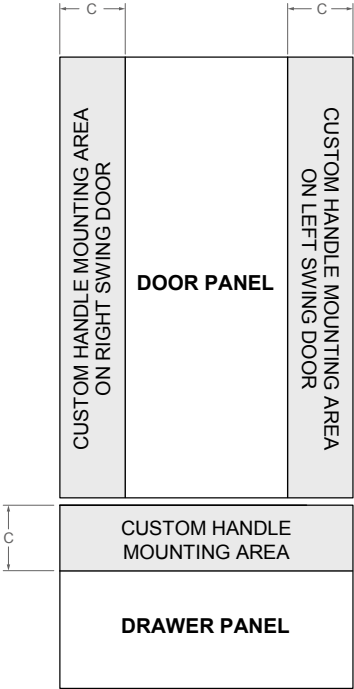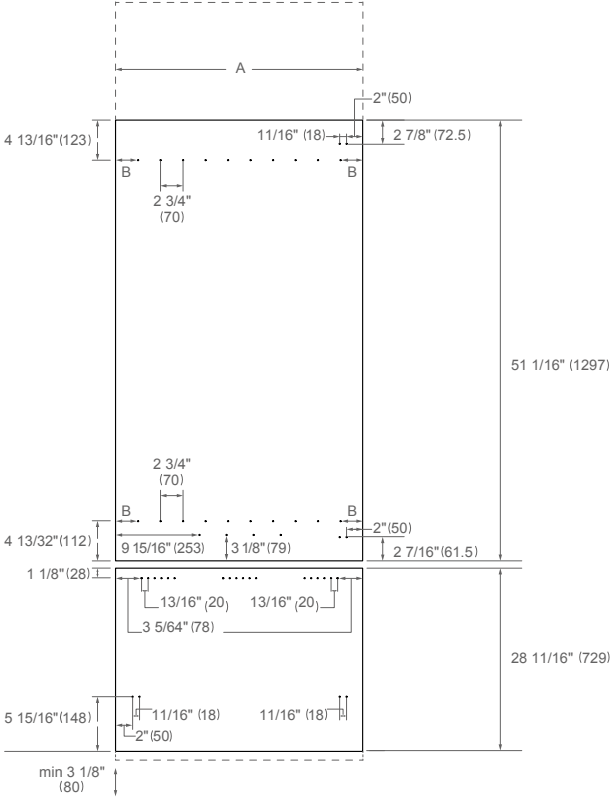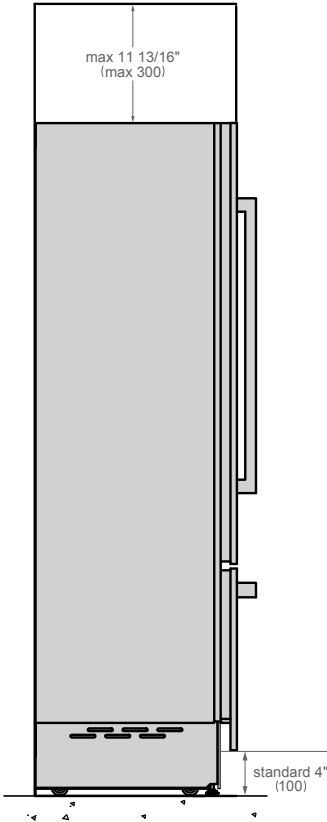


	36"	30"
A	35 3/4" (908)	29 3/4" (756)
B	5 1/2" (139)	2 1/2" (63)
C	7 1/8" (182)	6" (152)

Dimensions in parentheses are millimeters unless otherwise specified.


Bottom Mount Refrigeration Handles




PROFESSIONAL SERIES
PROHK36PI
PROHK30PI




MASTER SERIES
MASHK36PI
MASHK30PI




HERITAGE SERIES
HERHK36PI
HERHK30PI



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

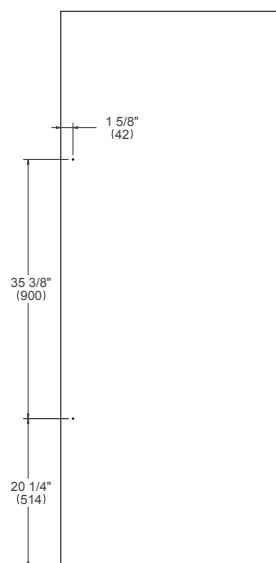

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

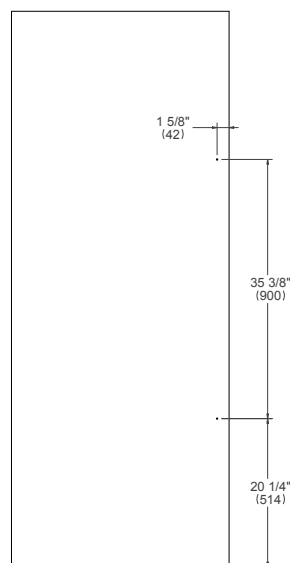

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at www.encompass.com

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

BERTAZZONI.COM



TO COOK BEAUTIFULLY